


专注于CNC夹具研发与生产
Focus on CNC fixture development and production

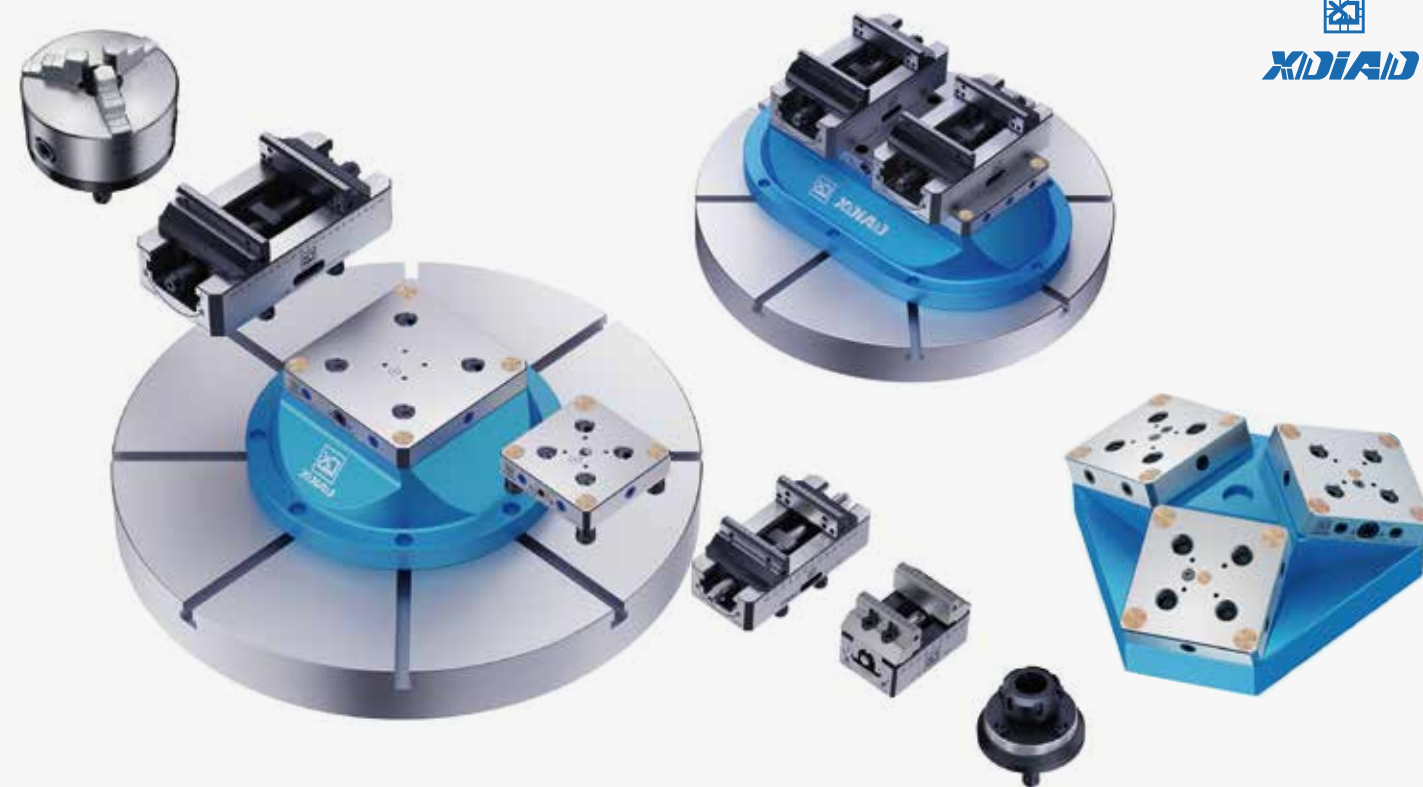

鑫点·产品手册

XDIAD · Product Manual

了解更多信息, 请联系我们 For more information, please contact us

官网 | Official website : (www.xindianprecise.com) (www.xindianpaf.com)

邮箱 | Mailbox : (contact@xindianprecise.com) (15311232006@163.com)

地址 | address : 东莞市长安镇新安社区新岗路23号
No. 23, Xingang Road, Xinan Community, Chang 'an Town, Dongguan City

东莞市鑫点精密科技有限公司
Dongguan Xin point precision technology Co., LTD

提供CNC高效加工解决方案
Provide CNC efficient machining solutions

1

CONTENTS 目录

产品展示 / Product Display P.03

- 1经济型自定心虎钳/Economic self-centering vice P.03
 - H54
 - H54L
 - H90
- 2高性价比自定心虎钳/High cost performance self-centering vice P.13
 - H67
 - H90X
 - H105
 - H120
- 3高端型自定心虎钳/High-end self-centering vice P.25
 - H77
 - H125
 - H200
- 4五轴手动快换板/5-axis manual quick change plate P.37
 - D52
 - D96
- 5五轴塔堆、三爪、筒夹/Five-axis tower, three claws, collet P.42



- 6虎钳连接板/Vice connecting plate P.46
- 7四轴虎钳立柱/Four-axis vice column P.48
- 8四轴单边桥板/Four-axis unilateral bridge plate P.49
- 9液压虎钳/Hydraulic vise P.52
 - H67Y
 - H90Y
 - W120
 - H125Y
- 10四轴多工位液压虎钳/Four-axis multi-station hydraulic vise P.54
- 11气动零点/Pneumatic zero P.57
 - K20.3
 - K40
- 12托盘/pallets P.72



COMPANY PROFILE

公司简介

东莞市鑫点精密科技有限公司

东莞市鑫点精密科技有限公司,专业生产EROWA 系列、system 3R系列的手动;气动基准卡盘、定位片,夹持坐、配用附件、零点定位系统等产品。

我们本着“专业服务,顾客为先”的服务宗旨,到位的服务和高质量的服务意识,赢得了广大客户的信任和赞许。我们以诚实待客、信誉为本的理念为广大客户提供优良的产品、到位的服务、与各地众多的客户建立了良好的业务关系,在广大用户中赢得了良好的信誉!

公司始终如一地坚持“以德敬业,方得亿心”以诚信、创新、敬业、奋进为发展的宗旨。现代化的管理模式,我们团结向上的精神风貌,孜孜不倦的敬业精神,是发展有力的保障。合格的质量,严格的交期,完善的服务是我们的承诺。

我们将会以更高的质量,更完善的售前和售后服务来回馈客户对我们长期的支持与信任,我们诚邀社会各界新老朋友光临指导、加深了解、真诚合作。

Dongguan Xindian Precision Technology Co., LTD

Dongguan Xindian Precision Technology Co., LTD., specializing in the production of EROWA series, system 3R series manual; Pneumatic reference chuck, positioning plate, clamping seat, accessories, zero point positioning system and other products.


Our spirit of "professional service, customer first" service purpose, in place service and high-quality service awareness, has won the trust and praise of our customers. We are honest hospitality, credit-based concept for our customers to provide excellent products, in place of service, and many customers around the establishment of good business relations, in the majority of users won a good reputation!

The company has always adhered to the "moral dedication, the way to 100 million heart" to integrity, innovation, dedication, striving for the purpose of development. Modern management mode, our spirit of unity and upward, tireless dedication, is a strong guarantee for development. Qualified quality, strict delivery, perfect service is our commitment.

We will be higher quality, more perfect pre-sales and after-sales service to repay customers for our long-term support and trust, we sincerely invite new and old friends from all walks of life to visit guidance, deepen understanding, sincere cooperation.



H54矮爪款 H54 short claw

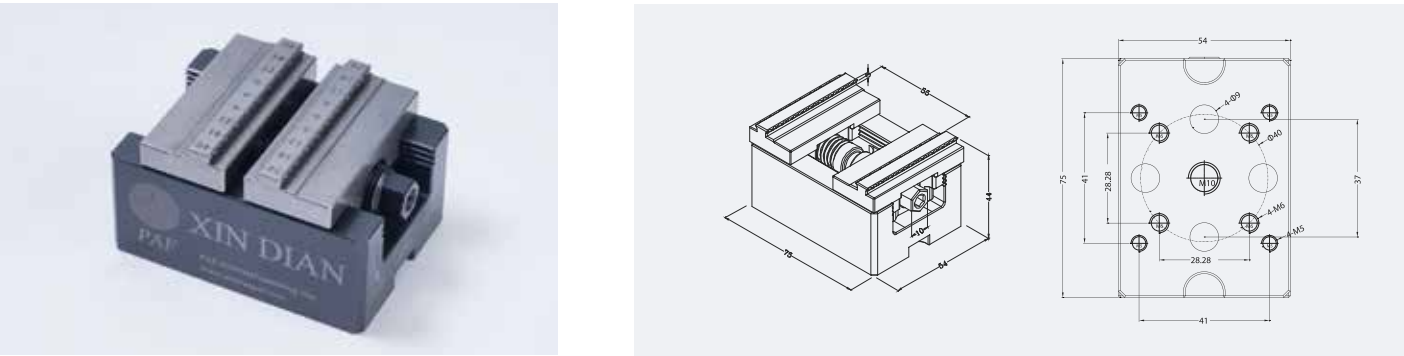


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
H54-8-55	75mm*54mm*44mm
H54-8-55-ER	Compatible with EROWA chuck
H54-8-55-3R	Compatible with SYSTEM 3R chuck
H54-8-55-C	Customized manipulator clamping position

应用： 夹持宽度8mm到55MM
Apply： Clamping width 8mm to 55MM

H54延伸爪款 H54 Extension claw model

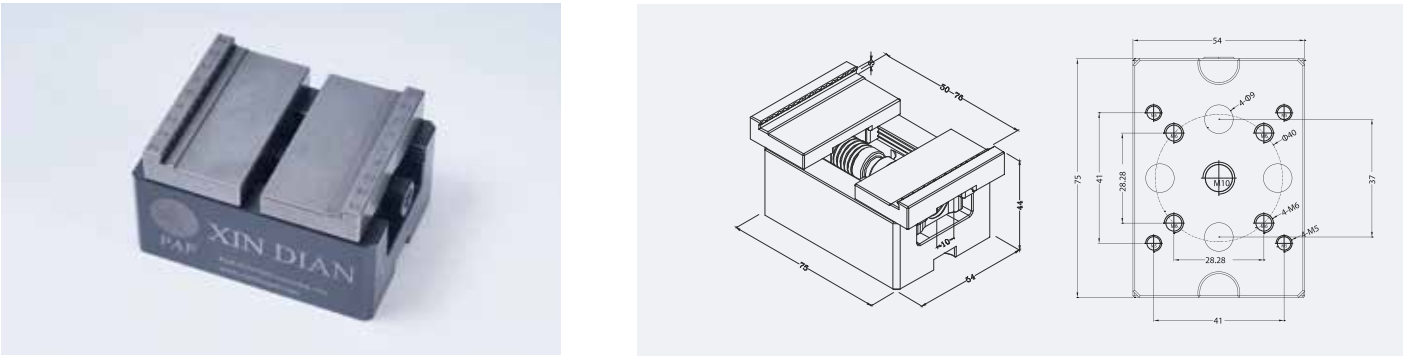


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
H54-50-75	75mm*54mm*44mm
H54-50-75-ER	Compatible with EROWA chuck
H54-50-75-3R	Compatible with SYSTEM 3R chuck
H54-50-75-C	Customized manipulator clamping position

应用： 夹持宽度50mm到75MM
Apply： Clamping width 50mm to 75MM

H54高爪款 H54 High claw model

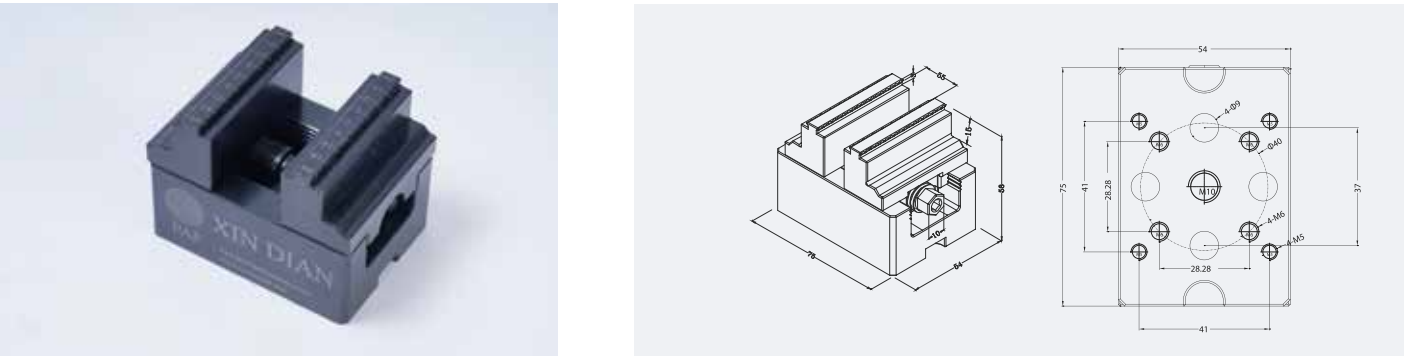


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
H54-8-55L	75mm*54mm*58mm
H54-8-55L-ER	Compatible with EROWA chuck
H54-8-55L-3R	Compatible with SYSTEM 3R chuck
H54-8-55-C	Customized manipulator clamping position

应用： 夹持宽度8mm到55MM，卡爪加高
Apply： The clamping width is 8mm to 55MM, and the jaw is increased

H54软爪款 H54 Soft claw

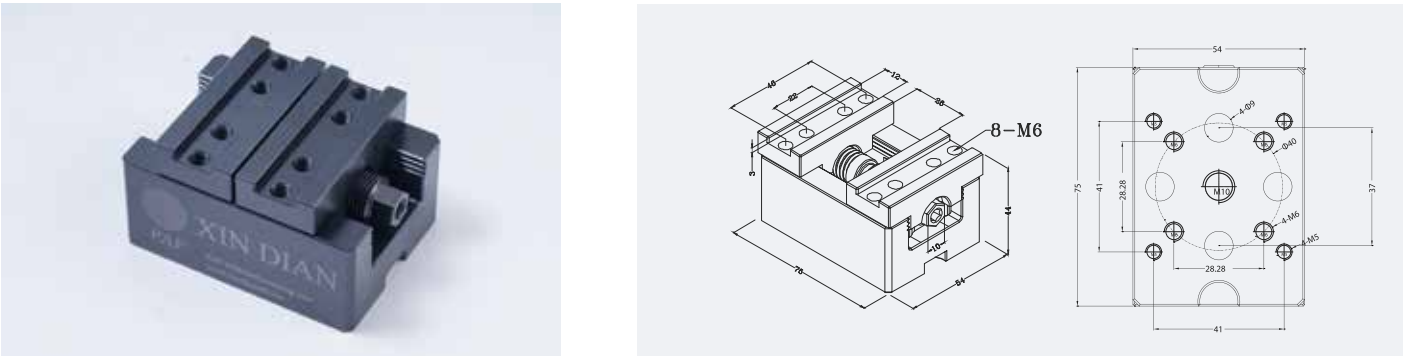


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
H54-L26	75mm*54mm*44mm
H54-L26-ER	Compatible with EROWA chuck
H54-L26-3R	Compatible with SYSTEM 3R chuck
H54-L26-C	Customized manipulator clamping position

应用： 行程26MM，可自行加装异形钳口
Apply： Travel 26MM, can be equipped with special pliers

H54/H54L通用-矮爪钳口 H54/H54L Universal - Low jaw jaws

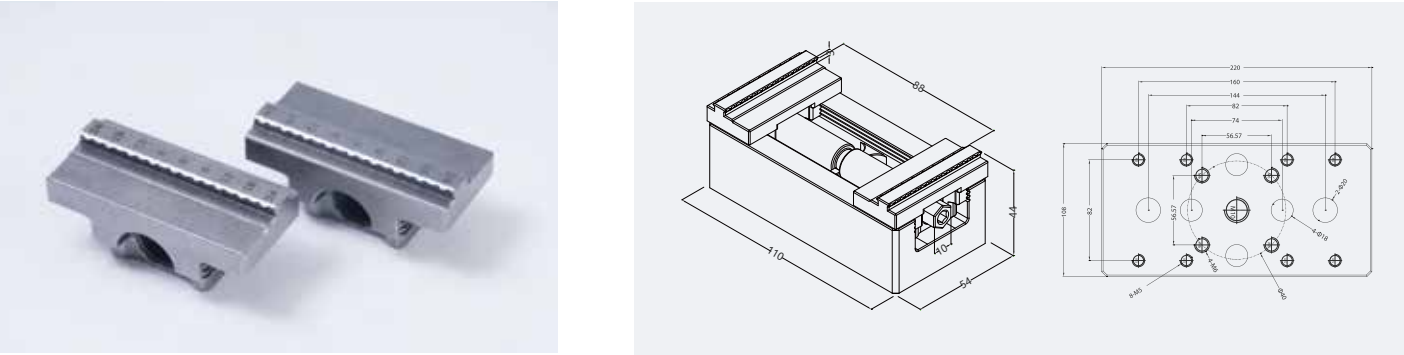


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
H54-8-55	75mm*54mm*44mm
H54-8-88	110mm*54mm*44mm

应用： H54-8-55款式夹持宽度8mm到55MM H54L-8-88款式夹持宽度8-88MM
Apply： H54-8-55 style clamping width 8mm to 55MM H54L-8-88 style clamping width 8-88MM

H54/H54L通用-延伸钳口 H54/H54L Universal - Extended jaws

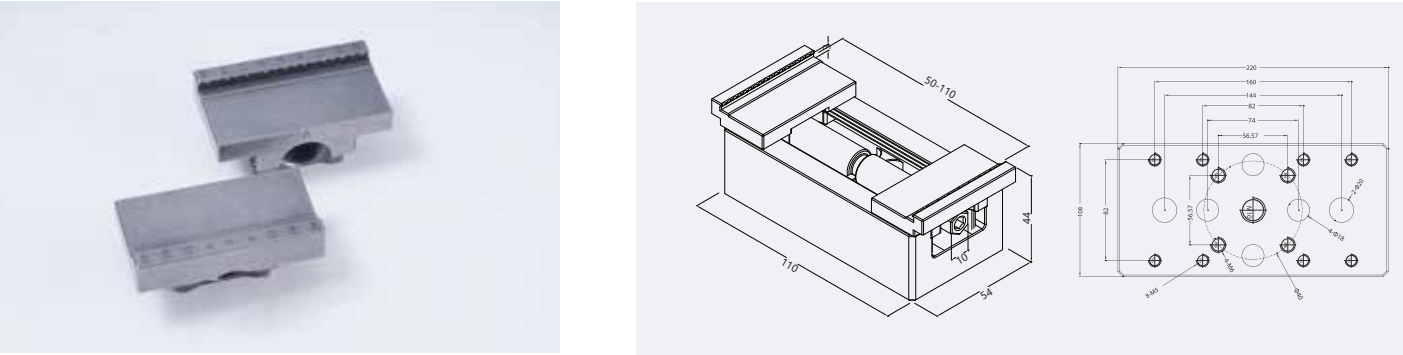


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
H54-50-75	75mm*54mm*44mm
H54L-10-110	110mm-54mm-44mm

应用： H54-50-75款式夹持宽度50mm到75MM H54L-50-110款式夹持宽度50-110MM
Apply： H54-50-75 style clamping width 50mm to 75MM H54L-50-110 style clamping width 50-110MM.

H54/H54L通用-高爪钳口 H54/H54L Universal - High jaw jaws

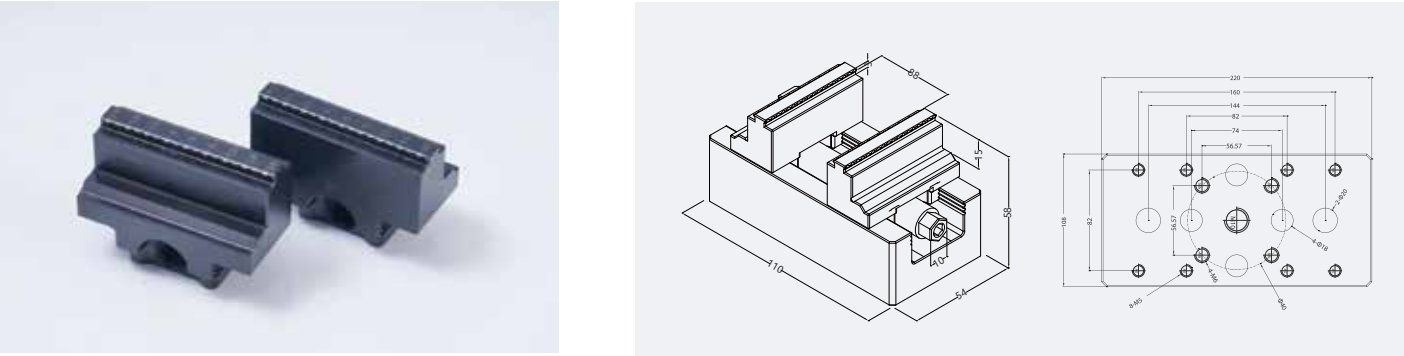


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
H54-8-55L	75mm*54mm*44mm
H54L-8-88L	110mm*54mm*58mm

应用： H54-8-55L款式夹持宽度8-55mm,H54-8-88L款式夹持宽度8-88,钳口加高款.
Apply： The clamping width of H54-8-55L style is 8-55mm, the clamping width of H54-8-88L style is 8-88, and the clamping width is increased.

H54/H54L通用-软爪钳口 H54/H54L Universal - Soft jaw jaws

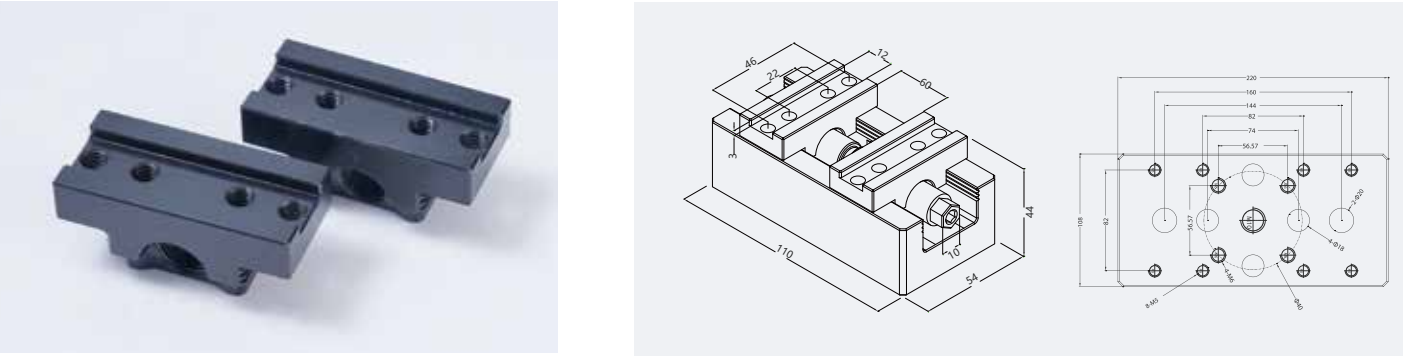

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
H54-L26	75mm*54mm*44mm
H54L-L60	110mm*54mm*44

应用： H54-L26行程26MM, H54L-L60行程60MM, 可自行加装异形钳口
Apply： H54-L26 stroke 26MM, H54L-L60 stroke 60MM, can be equipped with special pliers

H54通用螺杆 H54 universal screw




产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
H54螺杆 H54 screw	螺距14*1.25 长度70mm Pitch 14*1.25 length 70mm

应用： H54虎钳通用螺杆
Apply： H54 Universal screw for vice

H54L矮爪款 H54L Short Claw Style

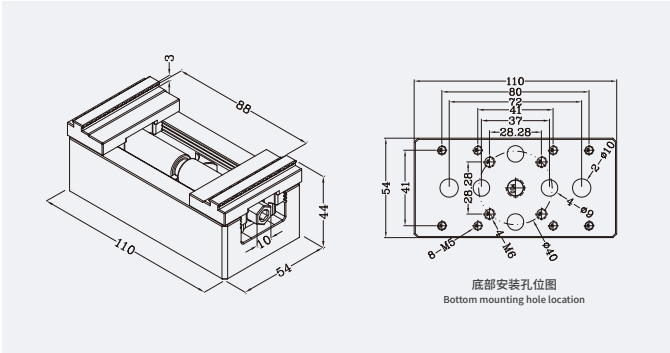


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
H54L-8-88	110mm*54mm*44mm
H54L-8-88-ER	Compatible with EROWA chuck
H54L-8-88-3R	Compatible with SYSTEM 3R chuck
H54L-8-88-C	Customized manipulator clamping position

应用： 夹持宽度8mm到88MM
Apply： Clamping width 8mm to 88MM

H54L高爪款 H54L high claw model

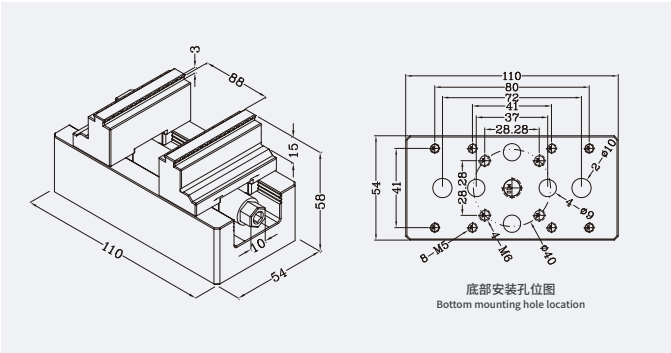


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
H54L-8-88L	110mm*54mm*58mm
H54L-8-88L-ER	Compatible with EROWA chuck
H54L-8-88L-3R	Compatible with SYSTEM 3R chuck
H54L-8-88L-C	Customized manipulator clamping position

应用： 夹持宽度8mm到88MM，卡爪加高
Apply： The clamping width is 8mm to 88MM, and the jaw is increased

H54L延伸爪款 H54L extended claw model

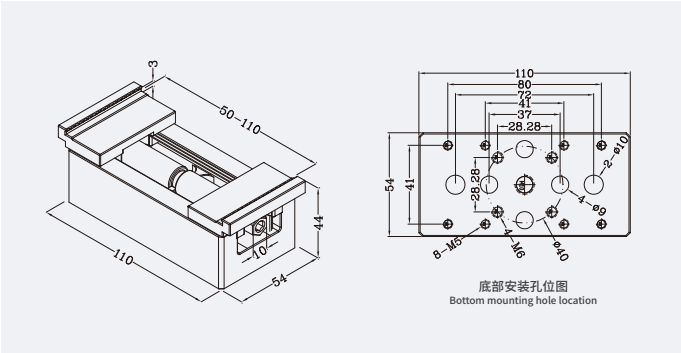


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
H54L-50-110	110mm*54mm*44mm
H54L-50-110-ER	Compatible with EROWA chuck
H54L-50-110-3R	Compatible with SYSTEM 3R chuck
H54L-50-110-C	Customized manipulator clamping position

应用： 夹持宽度50mm到110MM
Apply： Clamping width 50mm to 110MM

H54L软爪款 H54L Soft Claw Style

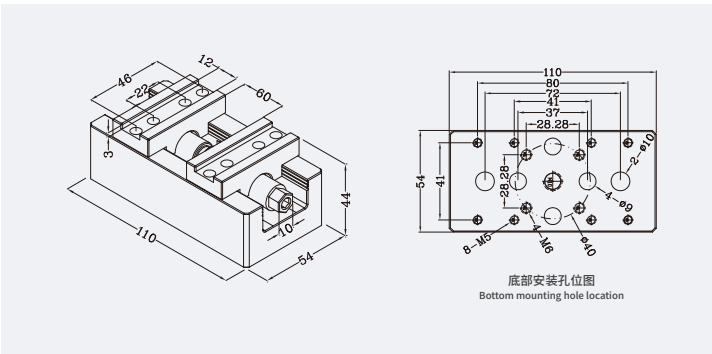


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
H54L-L60	110mm*54mm*44mm
H54L-L60-ER	Compatible with EROWA chuck
H54L-L60-3R	Compatible with SYSTEM 3R chuck
H54L-L60-C	Customized manipulator clamping position

应用：行程60MM,可自行加装异形钳口
Apply：Travel 60MM, can be equipped with special pliers

H90高爪款 H90 High claw model

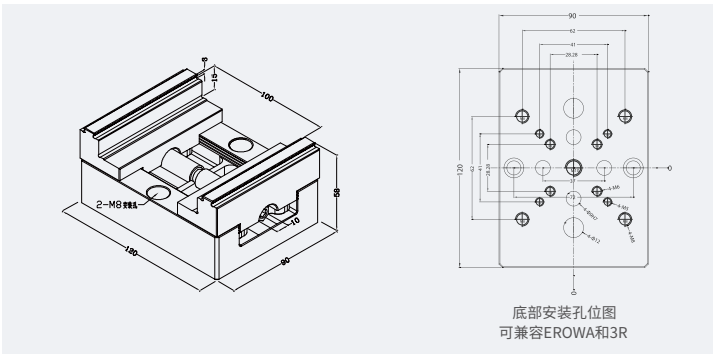


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
H90-10-100L	120mm*90mm*58mm
H90-10-100L-ER	Compatible with EROWA chuck
H90-10-100L-3R	Compatible with SYSTEM 3R chuck
H90-10-100L-C	Customized manipulator clamping position

应用：夹持宽度10mm到100MM,卡爪加高
Apply：The clamping width is 10mm to 100MM, and the clamping claw is increased

H90矮爪款 H90 short claw model

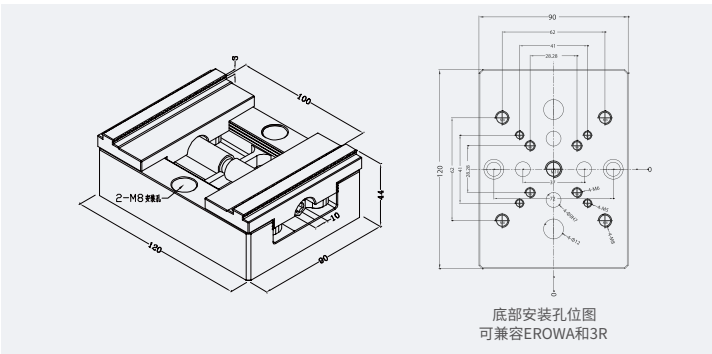


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
H90-10-100	120mm*90mm*44mm
H90-10-100-ER	Compatible with EROWA chuck
H90-10-100-3R	Compatible with SYSTEM 3R chuck
H90-10-100-C	Customized manipulator clamping position

应用：夹持宽度10mm到100MM
Apply：Clamping width 10mm to 100MM

H90软爪款 H90 soft claw model

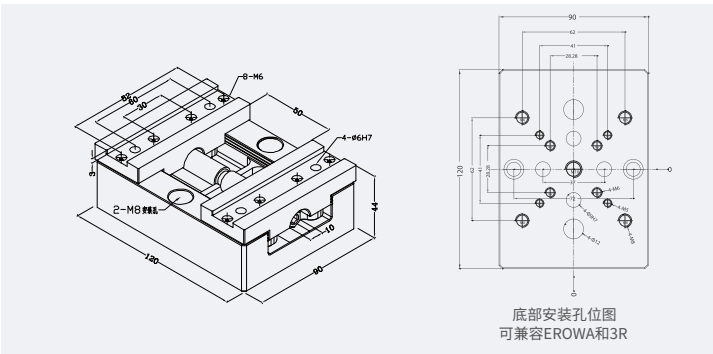


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
H90-L50	120mm*90mm*44mm
H90-L50-ER	Compatible with EROWA chuck
H90-L50-3R	Compatible with SYSTEM 3R chuck
H90-L50-C	Customized manipulator clamping position

应用：行程50MM,可自行加装异形钳口
Apply：Travel 50MM, can be equipped with special pliers

H90矮爪钳口 H90 Low claw jaws

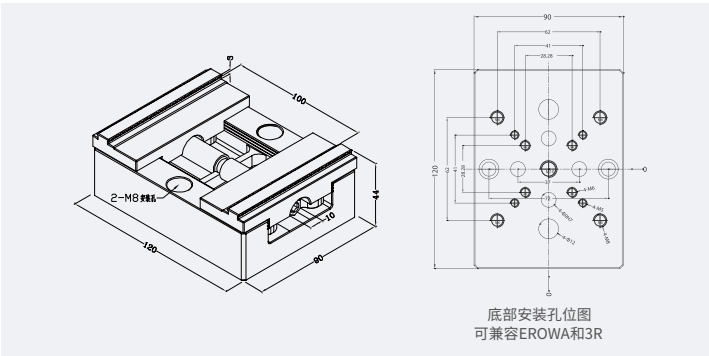


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
PAF-H90-P1	120mm*90mm*58mm

应用： 夹持宽度10mm到100MM, 卡爪加高
Apply： The clamping width is 10mm to 100MM, and the clamping claw is increased

H90高爪钳口 H90 High claw model

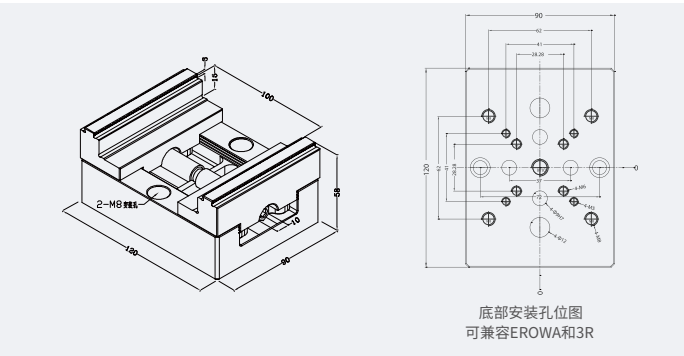


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
PAF-H90-P3	120mm*90mm*58mm

应用： 夹持宽度10mm到100MM, 卡爪加高
Apply： The clamping width is 10mm to 100MM, and the clamping claw is increased

H90软爪钳口 H90 soft claw model

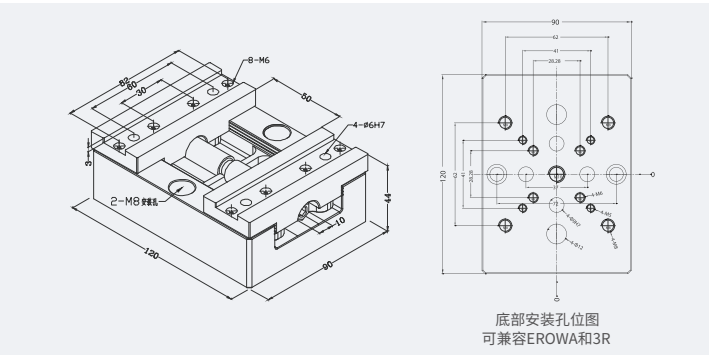

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
PAF-H90-P2	120mm*90mm*44mm

应用： 行程50MM, 可自行加装异形钳口
Apply： Travel 50MM, can be equipped with special pliers

H54L/H90通用螺杆 H54L/H90 universal screw




产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
H90-P4	14*1.25 长度105mm 14 x 1.25 Length 105mm

应用： 螺距14*1.25, 可搭配H54L/H90虎钳
Apply： Pitch 14*1.25, available with H54L/H90 vise

PRODUCT DISPLAY | H67 Self-centering vice
产品展示 | H67自定心虎钳

H67四方款 H67 square style

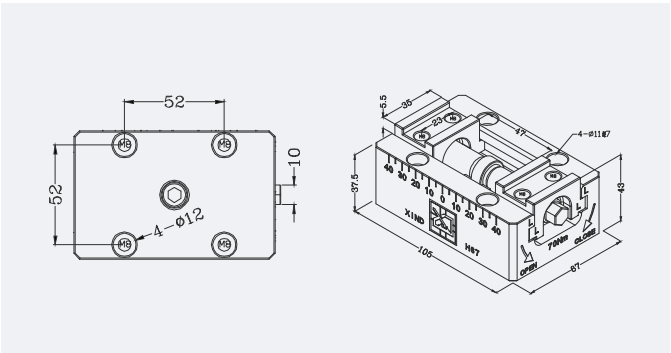


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
H67	105mm*67mm*43mm
H67-D52	Compatible with D52 chuck
H67-K20.3	Compatible with K20.3 chuck
H67-K40	Compatible with K40 chuck
K67-C	Customized manipulator clamping position

应用：行程47MM,可自行加装异形钳口
Apply: Travel 47MM, can be equipped with special pliers

H67四方硬爪组合款 H67 square hard claw combination

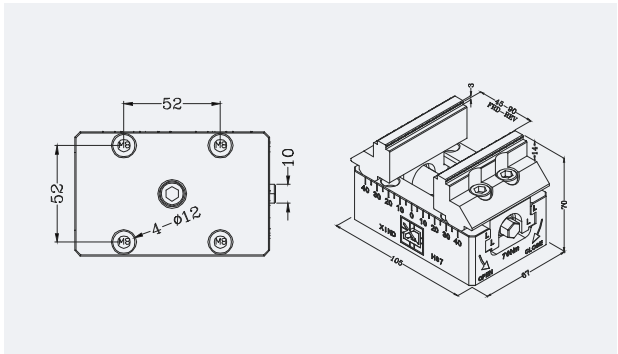


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
H67-90L	105mm*67mm*70mm
H67-90L-D52	Compatible with D52 chuck
H67-90L-K20.3	Compatible with K20.3 chuck
H67-90L-K40	Compatible with K40 chuck
K67-C	Customized manipulator clamping position

应用：夹持宽度正向45, 反向90
Apply: Clamping width forward 45, reverse 90

H67法兰款 H67 flange model

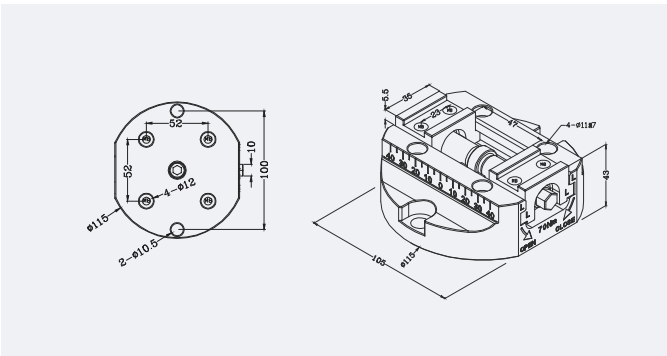


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
H67-F	115mm*105mm*43mm
H67-F-D52	Compatible with D52 chuck
H67-F-K20.3	Compatible with K20.3 chuck
H67-F-K40	Compatible with K40 chuck

应用：行程47MM,可自行加装异形钳口
Apply：Travel 47MM, can be equipped with special pliers

H67法兰硬爪组合款 H67 flange hard claw combination

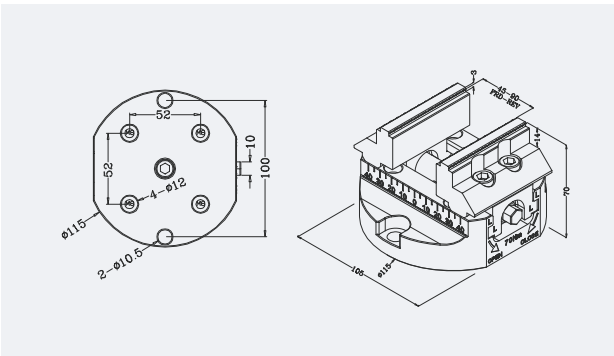


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
H67-F-90L	115mm*105mm*70mm
H67-F-90L-D52	Compatible with D52 chuck
H67-F-90L-K20.3	Compatible with K20.3 chuck
H67-F-90L-K40	Customized manipulator clamping position

应用：夹持宽度正向45,反向90
Apply：Clamping width forward 45, reverse 90

H67带齿硬爪 H67 with teeth hard claw


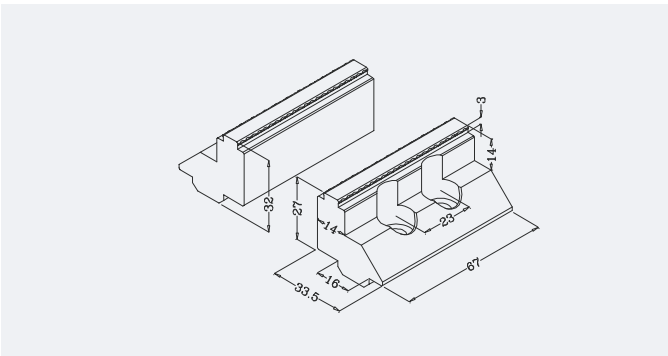


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
KZ-H67	67mm*33.5mm*27mm

应用：配套67系列使用
Apply：Used with 67 series

H67铝块 H67 aluminum block

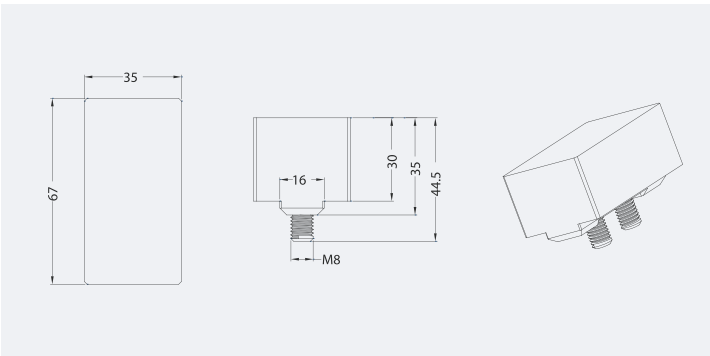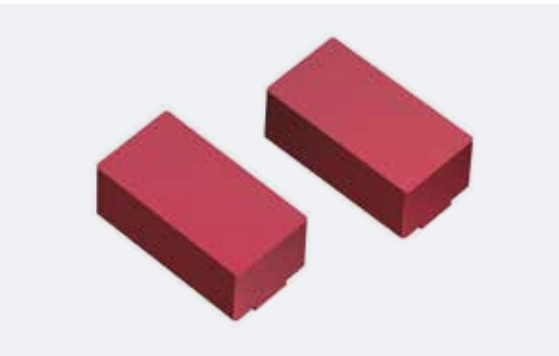

产品参数 Optical Parameters


产品型号 Product model	规格尺寸 Specification and size
KZ-H67-01	67mm*35mm*35mm

应用：安装于H67虎钳做仿形夹持
Apply：Mount in H67 vise for copying clamp

PRODUCT DISPLAY | H90X self-centering vice
产品展示 | H90X自定心虎钳



H90X四方款 H90X square model

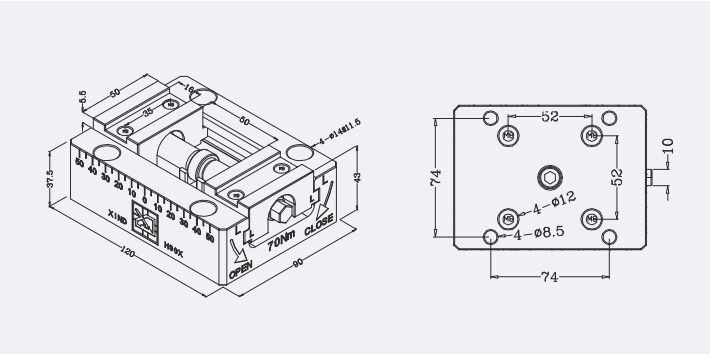


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
H90X	120mm*90mm*43mm
H90X-D52	Compatible with D52 chuck
H90X-K20.3	Compatible with K20.3 chuck
H90X-K40	Compatible with K40 chuck
H90X-C	Customized manipulator clamping position

应用：行程50MM, 可自行加装异形钳口
Apply: Travel 50MM, can be equipped with special pliers

H90X四方硬爪组合款 H90X square hard claw combination

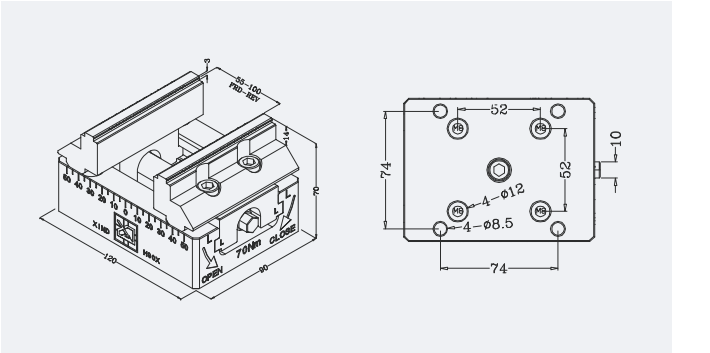


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
H90X-100L	120mm*90mm*70mm
H90X-100L-D52	Compatible with D52 chuck
H90X-100L-K20.3	Compatible with k20.3 chuck
H90X-100L-K40	Compatible with k40 chuck
H90X-100L-C	Customized manipulator clamping position

应用：夹持宽度正向55, 反向100
Apply: Clamping width forward 55, reverse 100

H90X法兰款 H90X flange

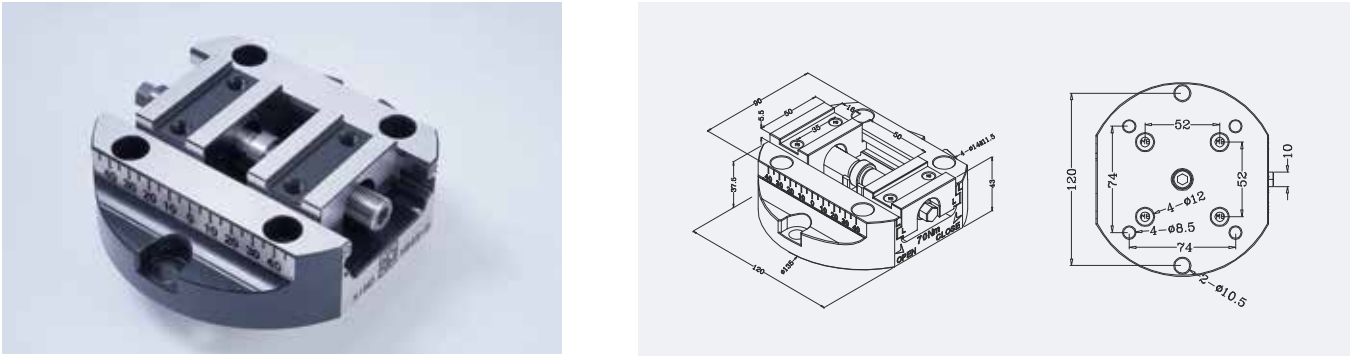


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
H90X-F	135mm*120mm*43mm
H90X-F-D52	Compatible with D52 chuck
H90X-F-K20.3	Compatible with K40 chuck
H90X-F-K40	Compatible with EROWA chuck

应用：行程50MM,可自行加装异形钳口
Apply：Travel 50MM, can be equipped with special pliers

Compatible with EROWA chuck

H90X法兰硬爪组合 H90X flange hard jaw combination

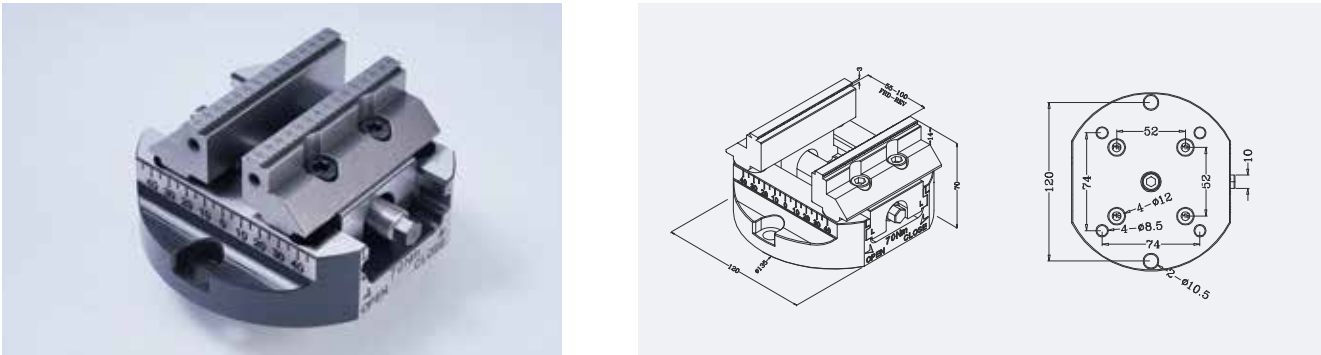


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
H90X-F-100L	135mm*120mm*70mm
H90X-F-100L-D52	Compatible with D52 chuck
H90X-F-100L-K20.3	Compatible with K20.3 chuck
H90X-F-100L-K40	Compatible with K40 chuck

应用：夹持宽度正向55,反向100
Apply：Clamping width forward 55, reverse 100

H90X带齿硬爪 H90X with tooth hard claw

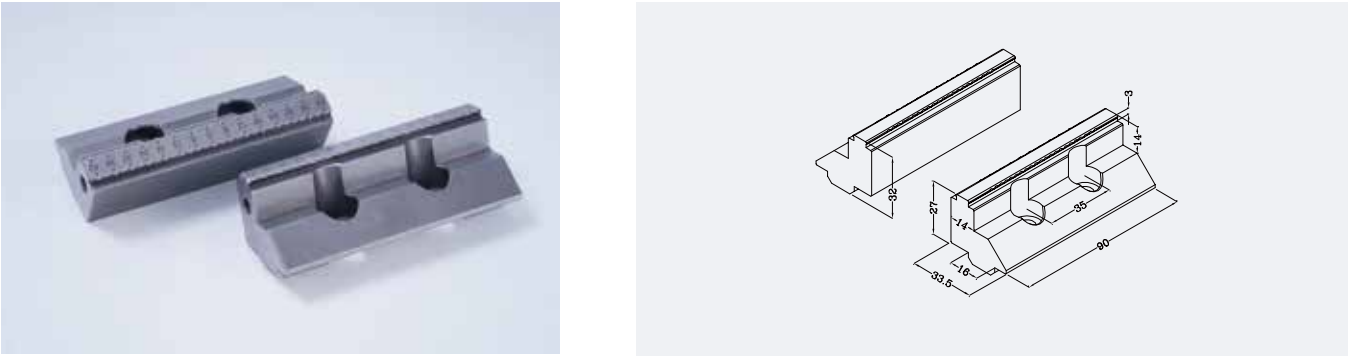


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
KZ-H90X	90mm*33.5mm*27mm

应用：配套90X系列使用
Apply：Used with the 90X series

H90X铝块 H90X aluminum block

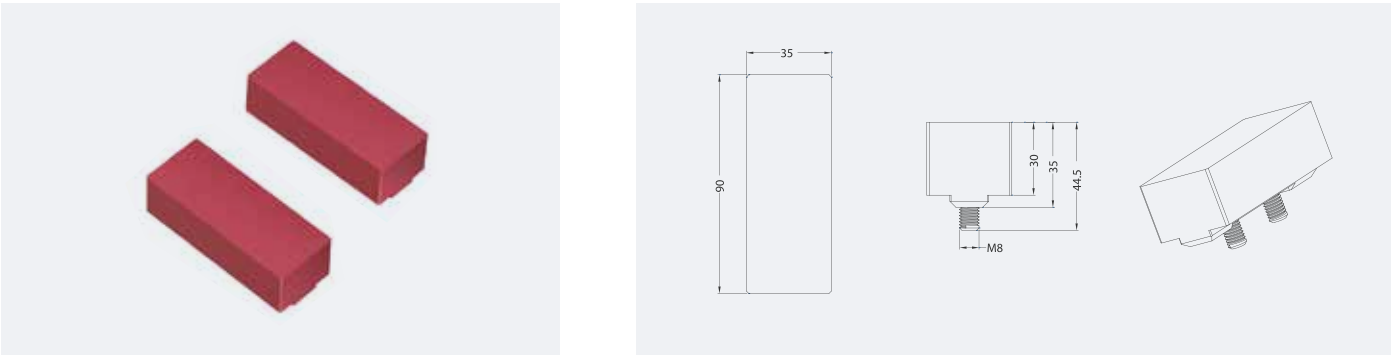


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
KZ-H90X-01	90mm*35mm*35mm

应用：安装于H90X虎钳做仿形夹持
Apply：Mount in H90X vise for copying clamp

H105四方款 H105 square model

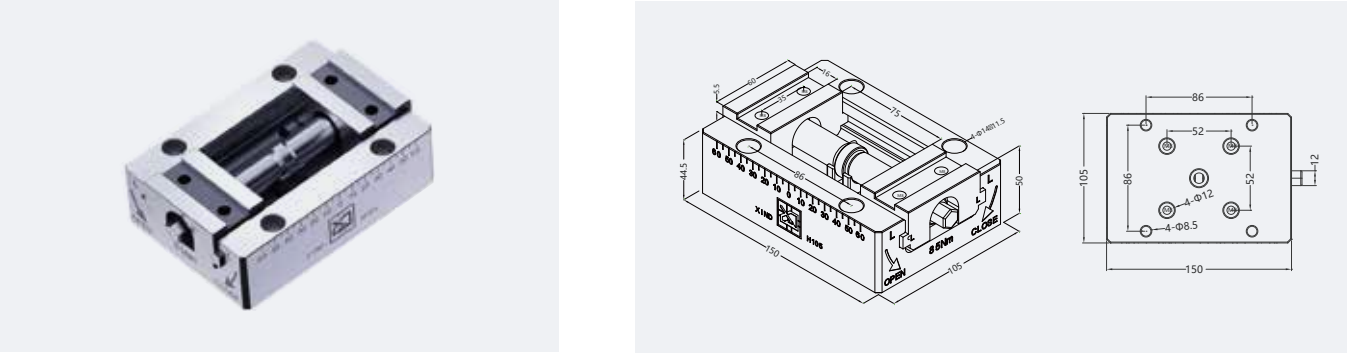


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
H105	150mm*105mm*50mm
H105-D52	Compatible with D52 chuck
H105-D96	Compatible with D96 chuck
H105-K20.3	Compatible with K20.3 chuck
H105-K40	Compatible with K40chuck
H105-C	Customized manipulator clamping position

应用：行程75MM, 可自行加装异形钳口
Apply: Travel 75MM, can be equipped with special pliers

H105带齿硬爪 H105 with tooth hard claw

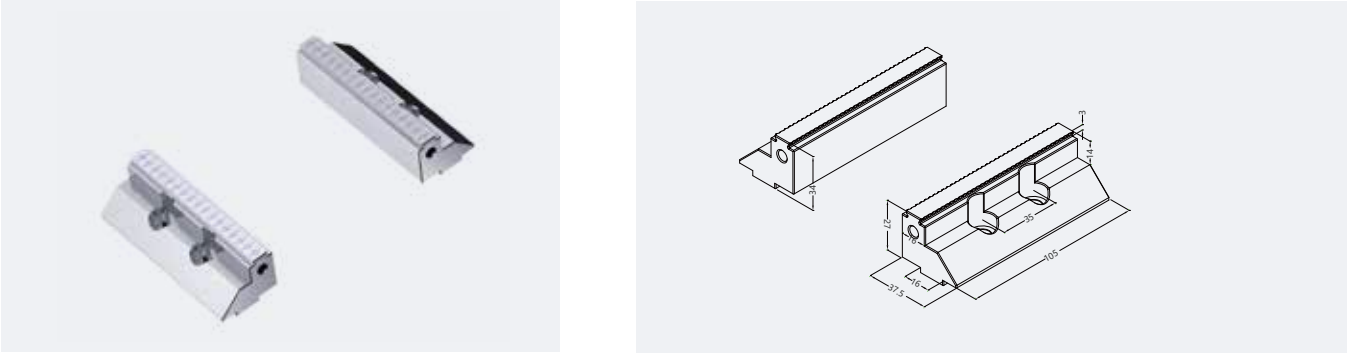


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
KZ-H105	105mm*37.5mm*34mm

应用：配套H105系列使用
Apply: Used with H105 series

H105法兰款 H105 flange model

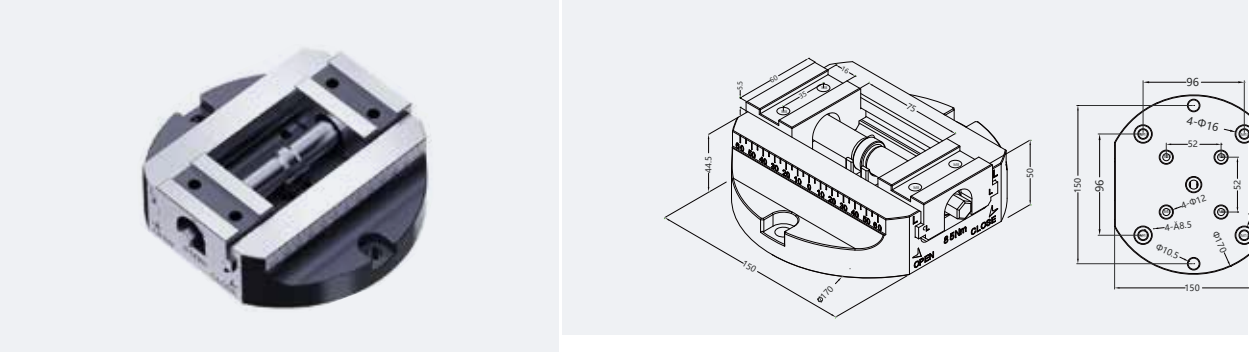


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
H105-F	170mm*150mm*50mm
H105-F-D52	Compatible with D52 chuck
H105-D96	Compatible with D96 chuck
H105-F-K20.3	Compatible with k20.3 chuck
H105-F-K40	Compatible with k40 chuck

应用：行程75MM, 可自行加装异形钳口
Apply: Travel 75MM, can be equipped with special pliers

H105法兰硬爪组合款 H105 flange hard claw combination

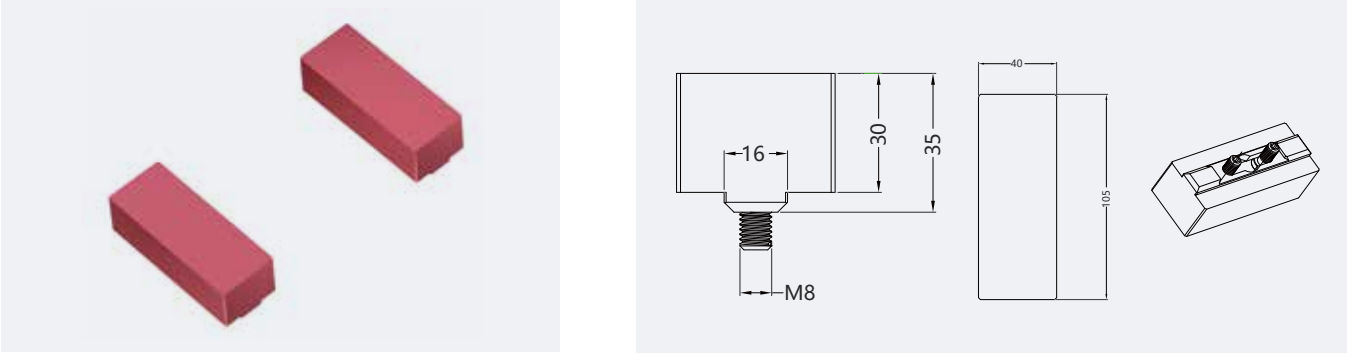


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
H105-F—130L	170mm*150mm*79mm

应用：夹持宽度正向80, 反向130
Apply: Clamping width forward 80, reverse 130

H120-6-150自定心虎钳 H120-6-150 Self-centering vice

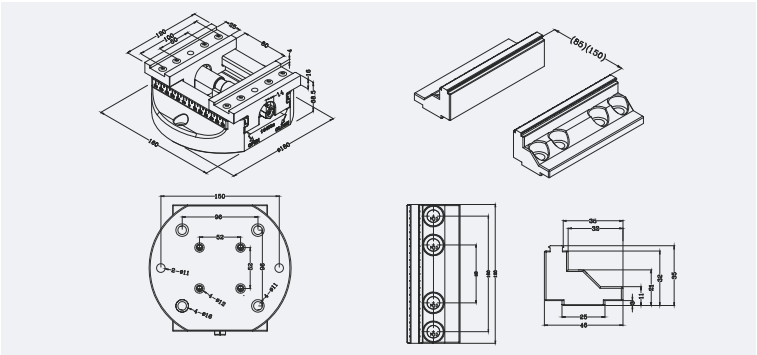


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
H120-6-150	160mm*180mm* 100.5mm
H120-6-150-D52	Compatible with D52 chuck
H120-6-150-D96	Compatible with D96 chuck
H120-6-150-K20.3	Compatible with K20.3 chuck
H120-6-150-K40	Compatible with K40 chuck

应用： 夹持宽度正向85反向150
Apply: Clamping width forward 85 reverse 150

H120硬爪 H120 Hard claw

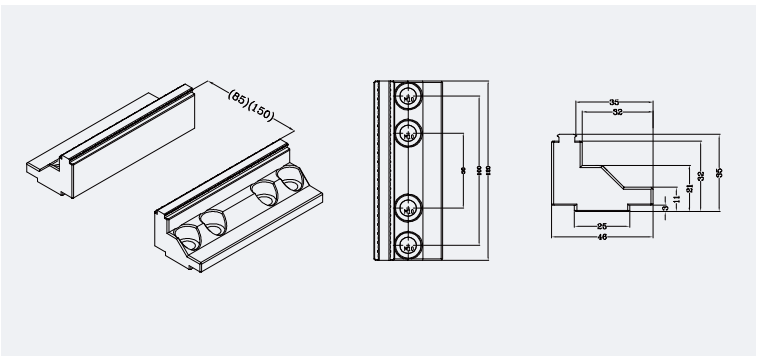


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
H120-C85-C150	120mm*46mm*35mm

应用： 配套H120虎钳使用
Apply: Used with H120 vise

H120自定心虎钳 H120 self-centering vice

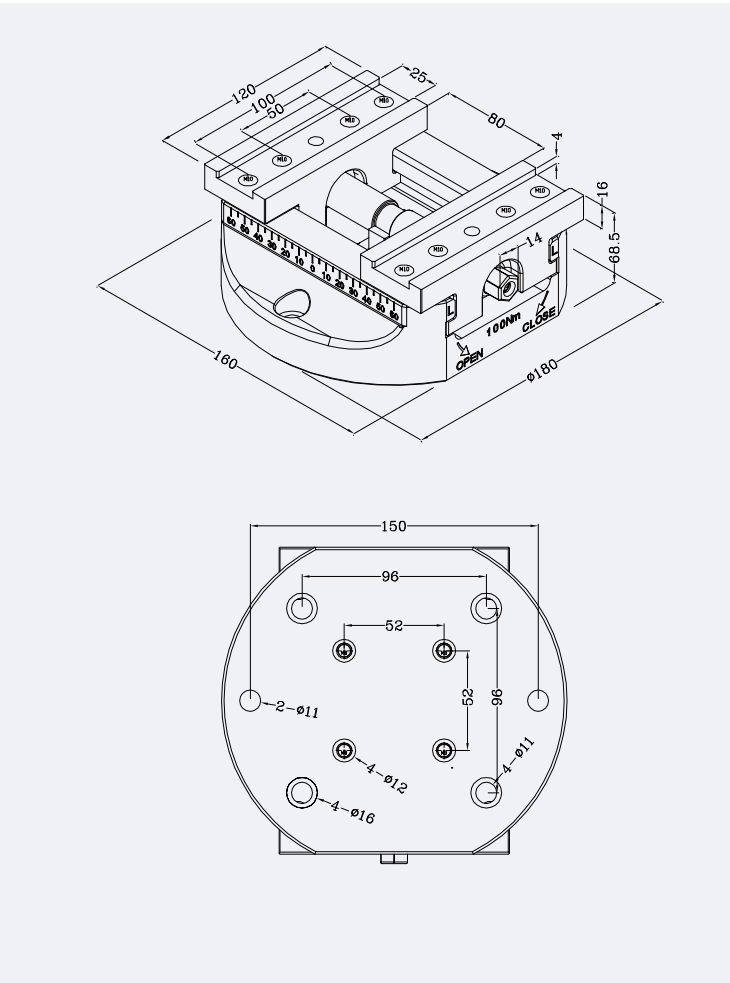


应用：
application:

行程80mm
Stroke 80mm

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
H120-L80	180mm*160mm*68.5mm
H120-L80-D52	Compatible with D52 chu
H120-L80-D96	Compatible with D96 chuck
H120-L80-K20.3	Compatible with K20.3 chuck
H120-L80-K40	Compatible with K40 chuck

H77自定心虎钳
 H77 Self centering vise

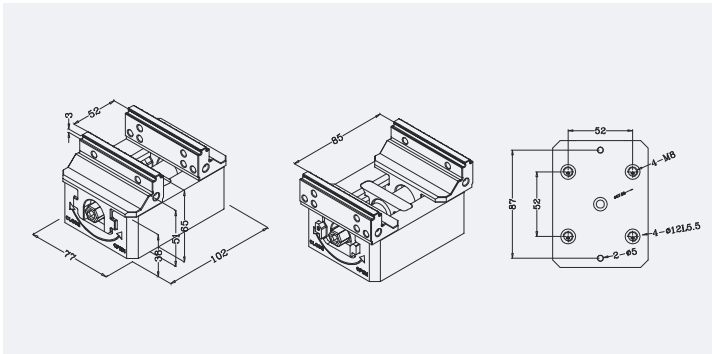


产品参数
 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重复定位精度 Positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H77-85 H77-85-D52 H77-85-k20.3 H77-85-k40 H77-85-C	102mm*77mm*65mm Compatible with D52 chuck Compatible with K20.3 chuck Compatible with K40 chuck Customized manipulator clamping position	0.02mm	70NM	85MM	2.5KG

应用：夹持不同大小的工件中心不变
 Apply：Hold the workpiece centers of different sizes unchanged

H77自定心虎钳
 H77 Self centering vise

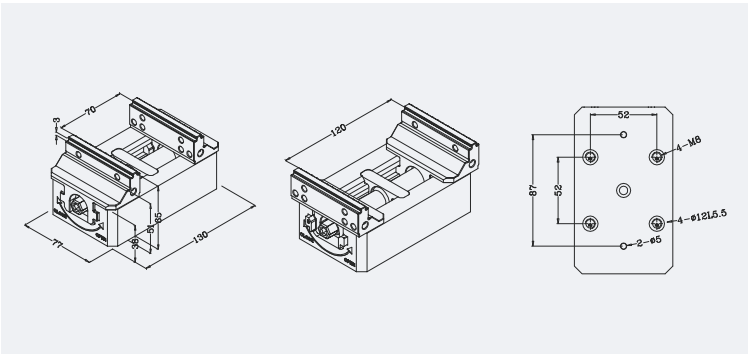


产品参数
 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重复定位精度 Positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H77-120 H77-120-D52 H77-120-k20.3 H77-120-k40 H77-120-C	130mm*77mm*65mm Compatible with D52 chuck Compatible with K20.3 chuck Compatible with K40 chuck Customized manipulator clamping position	0.02mm	70NM	120MM	3KG

应用：夹持不同大小的工件中心不变
 Apply：Hold the workpiece centers of different sizes unchanged

H77自定心虎钳
 H77 Self centering vise

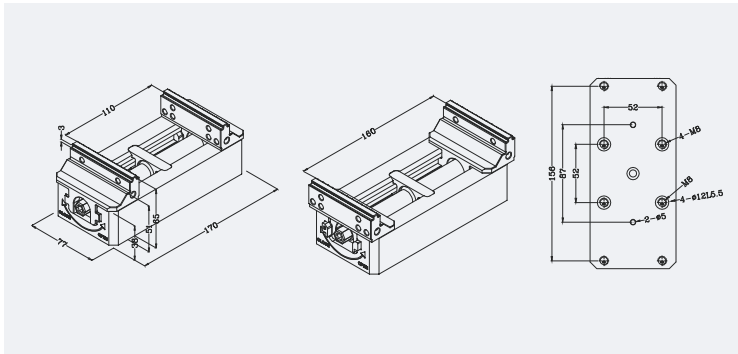


产品参数
 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重复定位精度 Positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H77-160 H77-160-D52 H77-160-k20.3 H77-160-k40 H77-160-C	170mm*77mm*65mm Compatible with D52 chuck Compatible with K20.3 chuck Compatible with K40 chuck Customized manipulator clamping position	0.02mm	70NM	160MM	3.6KG

应用：夹持不同大小的工件中心不变
 Apply：Hold the workpiece centers of different sizes unchanged

H77自定心虎钳
 H77 Self centering vise

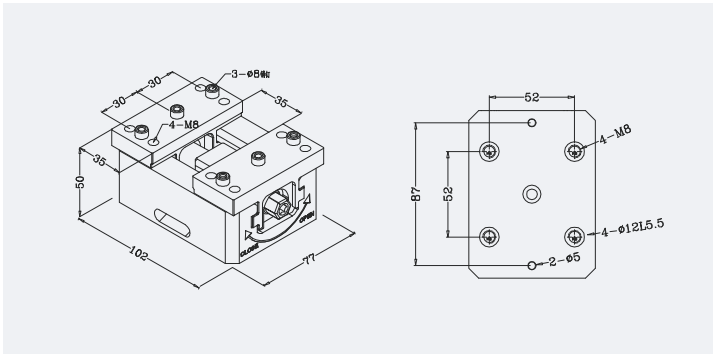


产品参数
 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重复定位精度 Positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H77-L35 H77-L35-D52 H77-L35-k20.3 H77-L35-k40 H77-L35-C	102mm*77mm*50mm Compatible with D52 chuck Compatible with K20.3 chuck Compatible with K40 chuck Customized manipulator clamping position	0.02mm	70NM	35MM	2.5KG

应用：夹持不同大小的工件中心不变
 Apply：Hold the workpiece centers of different sizes unchanged

H77自定心虎钳
 H77 Self centering vise

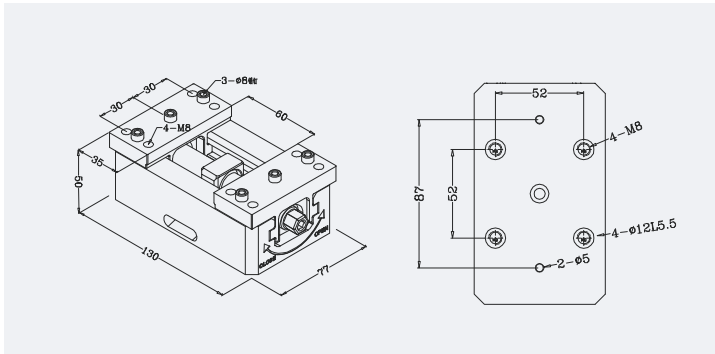


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重复定位精度 Positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H77-L60 H77-L60-D52 H77-L60-k20.3 H77-L60-k40 H77-L60-C	130mm*77mm*50mm Compatible with D52 chuck Compatible with K20.3 chuck Compatible with K40 chuck Customized manipulator clamping position	0.02mm	70NM	60MM	3KG

应用： 夹持不同大小的工件中心不变
 Apply: Hold the workpiece centers of different sizes unchanged

H77自定心虎钳
 H77 Self centering vise

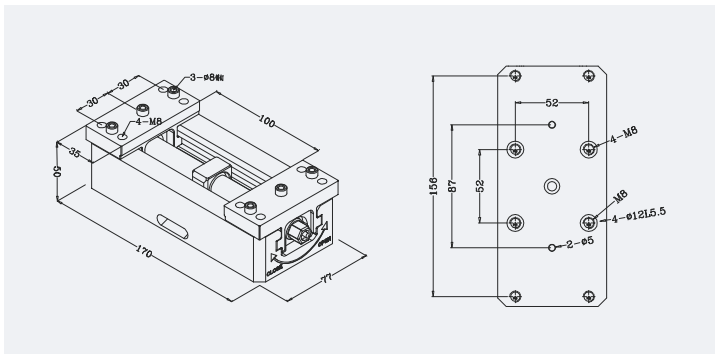


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重复定位精度 Positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H77-L100 H77-L100-D52 H77-L100-k20.3 H77-L100-k40 H77-L100-C	170mm*77mm*55mm Compatible with D52 chuck Compatible with K20.3 chuck Compatible with K40 chuck Customized manipulator clamping position	0.02mm	70NM	100MM	3.6KG

应用： 夹持不同大小的工件中心不变
 Apply: Hold the workpiece centers of different sizes unchanged

H77-L10-L自定心虎钳
 H77-L10-L Self centering vise

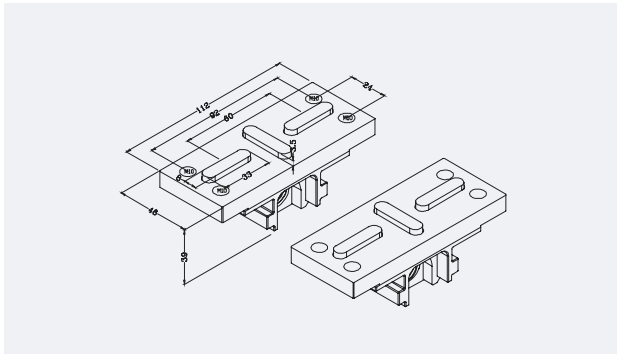


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重复定位精度 Positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H77-L10-L H77-L10-L-D52 H77-L10-L-k20.3 H77-L10-L-k40 H77-L10-L-C	102mm*77mm*65mm Compatible with D52 chuck Compatible with K20.3 chuck Compatible with K40 chuck Customized manipulator clamping position	0.02mm	70NM	10MM	2.5KG

应用： 夹持不同大小的工件中心不变
 Apply: Hold the workpiece centers of different sizes unchanged

H77-L38-L自定心虎钳
 H77-L38-L Self centering vise

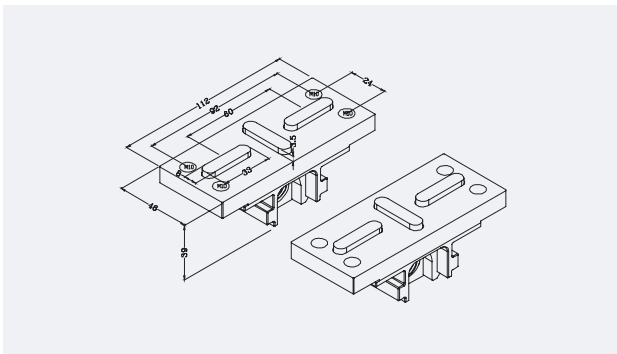


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重复定位精度 Positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H77-L38-L H77-L38-L-D52 H77-L38-L-k20.3 H77-L38-L-k40 H77-L38-L-C	102mm*77mm*65mm Compatible with D52 chuck Compatible with K20.3 chuck Compatible with K40 chuck Customized manipulator clamping position	0.02mm	70NM	38MM	3KG

应用： 夹持不同大小的工件中心不变
 Apply: Hold the workpiece centers of different sizes unchanged

H77自定心虎钳
 H77 Self centering vise

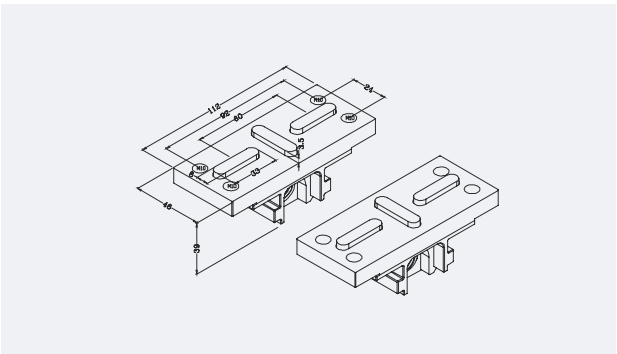


产品参数
 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重复定位精度 Positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H77-L78-L	102mm*77mm*65mm	0.02mm	70NM	78MM	3.6KG
H77-L78-L-D52	Compatible with D52 chuck				
H77-L78-L-k20.3	Compatible with K20.3 chuck				
H77-L78-L-k40	Compatible with K40 chuck				
H77-L78-L-C	Customized manipulator clamping position				

应用： 夹持不同大小的工件中心不变
 Apply: Hold the workpiece centers of different sizes unchanged

H77软钳口
 H77 Soft jaws

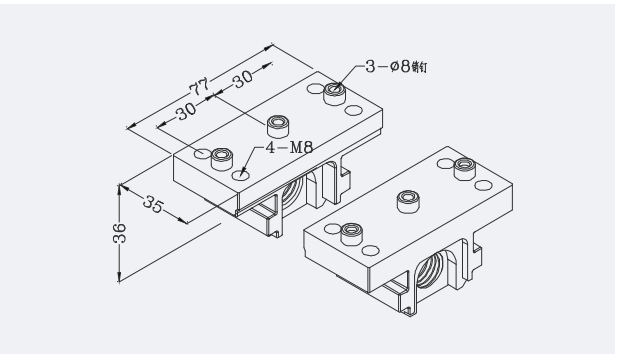


产品参数
 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	材质 Texture of material
H77-R2	77mm*36mm*38mm	合金钢(HRC56°)

应用： H77配套钳口,可安装异形钳口
 Apply: H77 matching pliers, can be installed special-shaped pliers

H77加长软钳口
 H77 Extended soft jaws

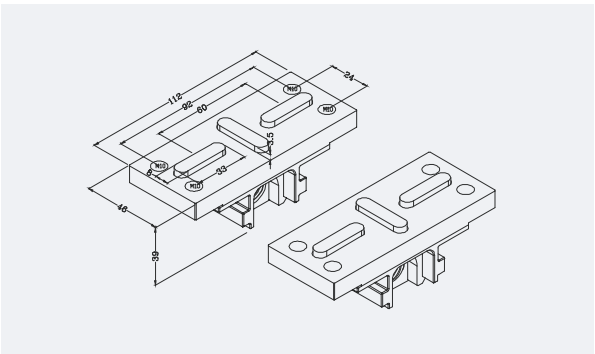


产品参数
 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	材质 Texture of material
H77-RD3	112mm*46mm*39mm	合金钢(HRC56°)

应用： H77配套钳口,可安装异形钳口
 Apply: H77 matching pliers, can be installed special-shaped pliers

H77硬钳口
 H77 Hard jaws

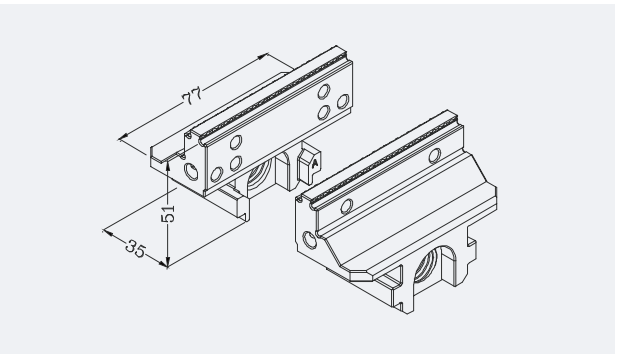


产品参数
 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	材质 Texture of material
H77-Y1	77mm*51mm*35mm	合金钢(HRC56°)

应用： H77配套钳口,带牙齿
 Apply: H77 matching jaws with teeth

H125-170自定心虎钳 H125-170 Self-centering vice

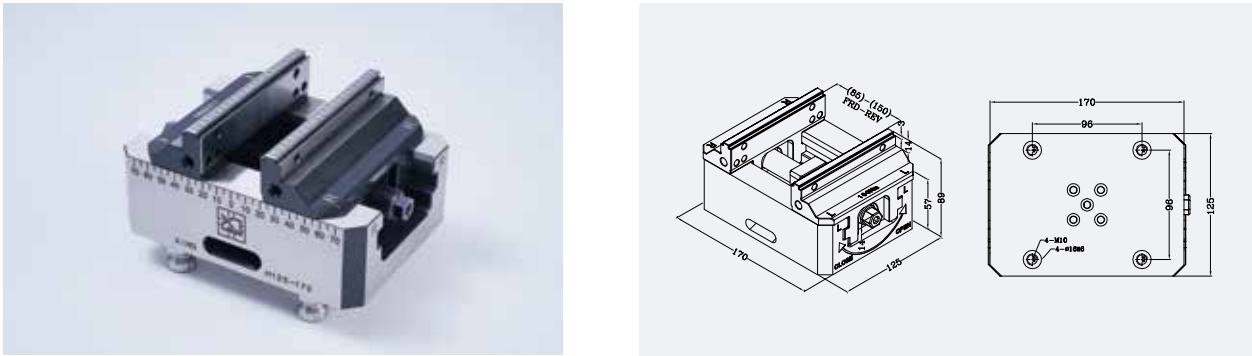


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重复定位精度 positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H125-170 H125-170-D96 H125-170-k40 H125-170-C	170mm*125mm*89mm Compatible with D96 chuck Compatible with K40 chuck Customized manipulator clamping position	0.02mm	100NM	150MM	8.8KG

应用： 夹持不同大小的工件中心不变
 Apply： Hold the workpiece centers of different sizes unchanged

H125-210自定心虎钳 H125-210 Self-centering vice

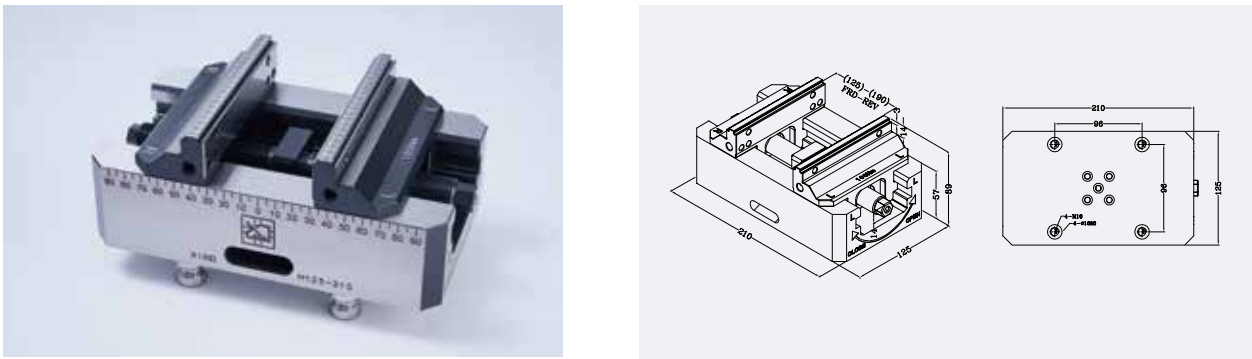


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重复定位精度 positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H125-210 H125-210-D96 H125-210-k40 H125-210-C	210mm*125mm*89mm Compatible with D96 chuck Compatible with K40 chuck Customized manipulator clamping position	0.02mm	100NM	190MM	10.3KG

应用： 夹持不同大小的工件中心不变
 Apply： Hold the workpiece centers of different sizes unchanged

H125-250自定心虎钳 H125-250 Self-centering vice

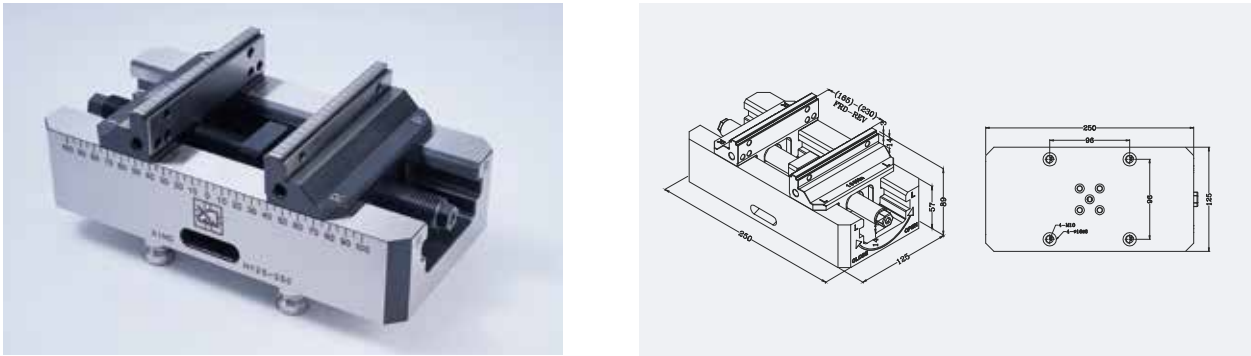


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重复定位精度 positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H125-250 H125-250-D96 H125-250-k40 H125-250-C	250mm*125mm*89mm Compatible with D96 chuck Compatible with K40 chuck Customized manipulator clamping position	0.02mm	100NM	230MM	11.9KG

应用： 夹持不同大小的工件中心不变
 Apply： Hold the workpiece centers of different sizes unchanged

H125-290自定心虎钳 H125-290 self-centering vice

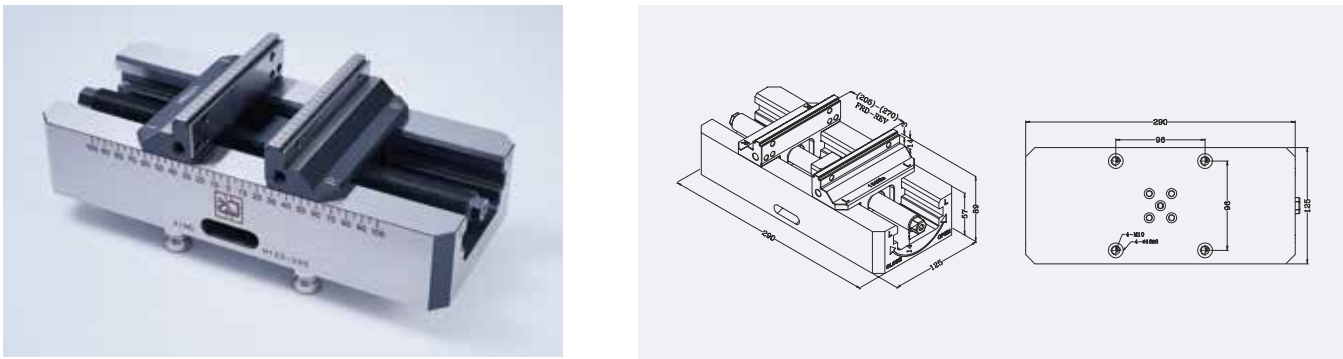


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重复定位精度 positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H125-290 H125-290-D96 H125-290-k40 H125-290-C	290mm*125mm*89mm Compatible with D96 chuck Compatible with K40 chuck Customized manipulator clamping position	0.02mm	100NM	270MM	13.4KG

应用： 夹持不同大小的工件中心不变
 Apply： Hold the workpiece centers of different sizes unchanged

H125-L75自定心虎钳 H125-L75 Self-centering vice

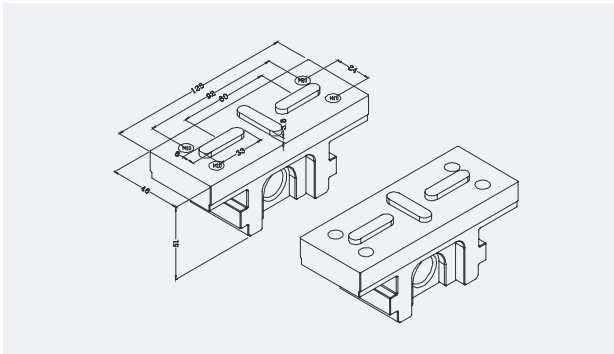


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重复定位精度 positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H125-L75	170mm*125mm*89mm	0.02mm	100NM	75MM	8.8KG
H125-L75-D96	Compatible with D96 chuck				
H125-L75-k40	Compatible with K40 chuck				
H125-L75-C	Customized manipulator clamping position				

应用： 夹持不同大小的工件中心不变
Apply： Hold the workpiece centers of different sizes unchanged

H125-L115自定心虎钳 H125-L115 Self-centering vice

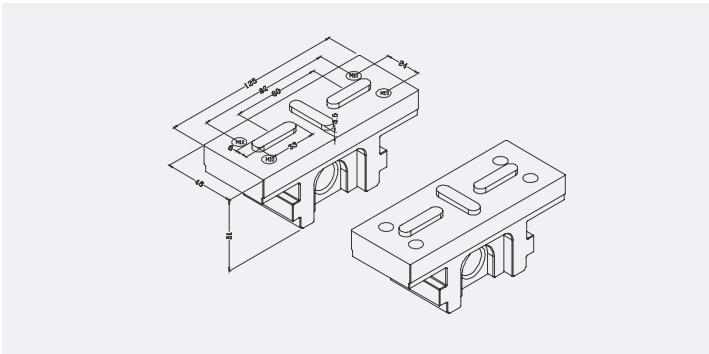


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重复定位精度 positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H125-L115	210mm*125mm*89mm	0.02mm	100NM	115MM	10.3KG
H125-L115-D96	Compatible with D96 chuck				
H125-L115-k40	Compatible with K40 chuck				
H125-L115-C	Customized manipulator clamping position				

应用： 夹持不同大小的工件中心不变
Apply： Hold the workpiece centers of different sizes unchanged

H125-L155自定心虎钳 H125-L155 Self-centering vice

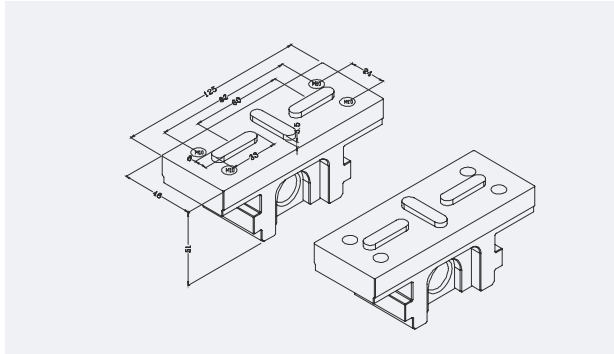


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重复定位精度 positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H125-L155	250mm*125mm*89mm	0.02mm	100NM	155MM	11.9KG
H125-L155-D96	Compatible with 96 chuck				
H125-L155-k40	Compatible with K40 chuck				
H125-L155-C	Customized manipulator clamping position				

应用： 夹持不同大小的工件中心不变
Apply： Hold the workpiece centers of different sizes unchanged

H125-L195自定心虎钳 H125-L195 Self-centering vice

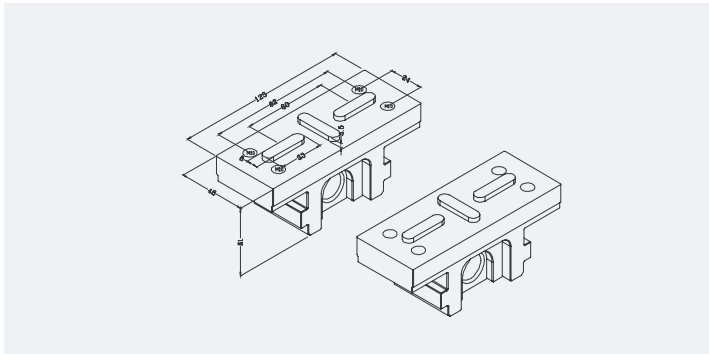


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重复定位精度 positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H125-L195	290mm*125mm*89mm	0.02mm	100NM	195MM	13.4KG
H125-L195-D96	Compatible with D96 chuck				
H125-L195-k40	Compatible with K40 chuck				
H125-L195-C	Customized manipulator clamping position				

应用： 夹持不同大小的工件中心不变
Apply： Hold the workpiece centers of different sizes unchanged

H125软钳口H125 Soft jaws

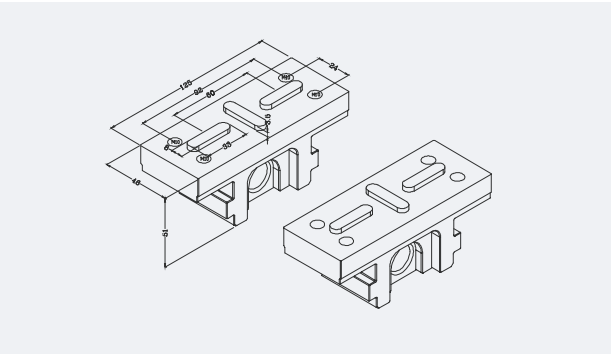


产品参数Optical Parameters

产品型号 Product model	规格尺寸 Size and size	材质 material
H125-R2	125mm*21mm*45mm	Alloy steel(HRC56°)

应用：H125配套钳口,可安装异形钳口

Apply：H125 matching pliers, can be installed special-shaped pliers

H125硬钳口H125 Hard jaws

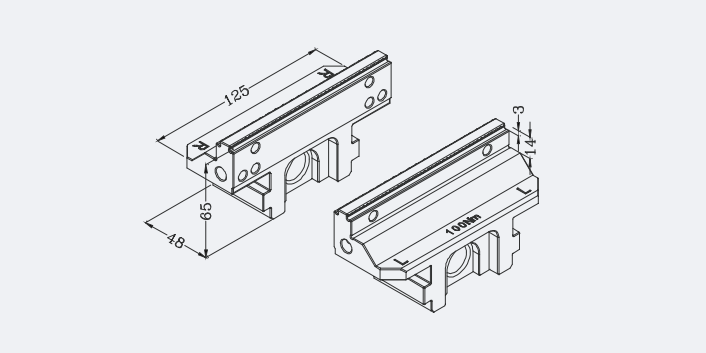


产品参数Optical Parameters

产品型号 Product model	规格尺寸 Size and size	材质 Texture of material	重复定位精度 Positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H125-Y1	125mm*65mm*48mm	Alloy steel(HRC56°)	0.02mm	70Nm	120MM	3KG

应用：H125配套钳口,带牙齿

Apply：H125 matching jaws with teeth

H200法兰重型款H200 Flange heavy duty model

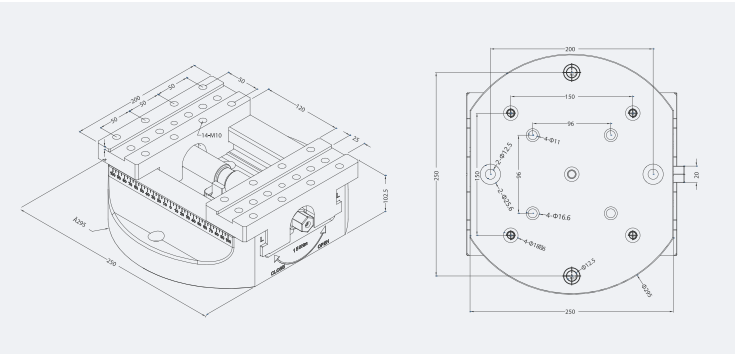


产品参数Optical Parameters

产品型号 Product model	规格尺寸 Size and size	材质 Texture of material	重复定位精度 Positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H200-L120	102mm*77mm*65mm	Alloy steel(HRC58°)	0.02mm	70Nm	120MM	37KG

应用：夹持不同大小的工件中心不变

Apply：Hold the workpiece centers of different sizes unchanged

H200法兰重型组合款H200 flange heavy duty combination

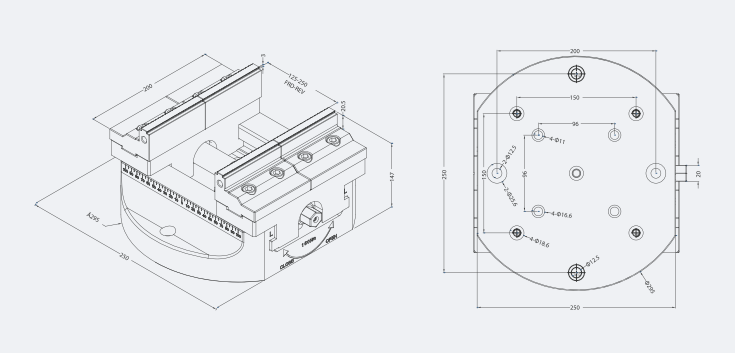

产品参数Optical Parameters


产品型号 Product model	规格尺寸 Size and size	材质 Texture of material	重复定位精度 Positioning accuracy	螺杆最大扭矩 Pressure standard	开口距离 Opening distance	重量 weight
H200	102mm*77mm*65mm	Alloy steel(HRC58°)	0.02mm	70Nm	250MM	42KG

应用：夹持不同大小的工件中心不变

Apply：Hold the workpiece centers of different sizes unchanged

PRODUCT DISPLAY | D52/D96 series
产品展示 | D52/D96系列

D52正方手动零点定位板 D52 square manual zero positioning plate

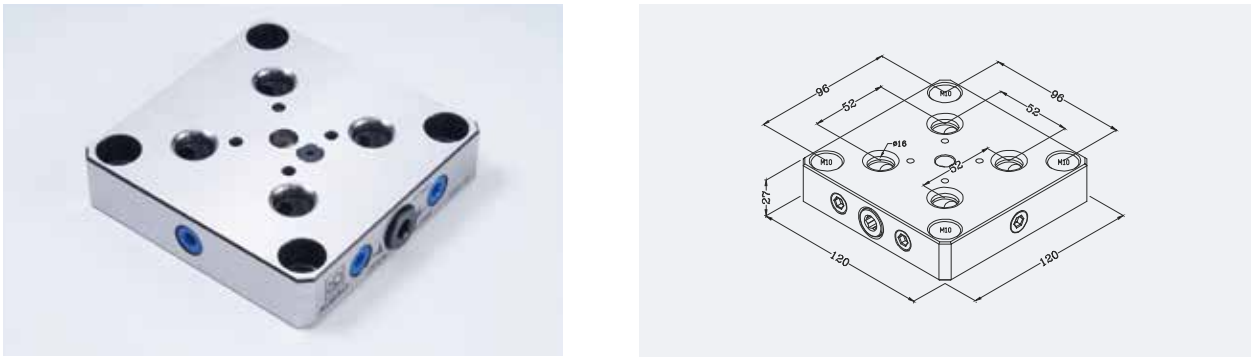


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size	材质 material	重复定位精度 Repeated positioning accuracy	螺杆最大扭矩 Maximum torque of screw	定位孔间距 Spacing of locating holes	重量 weight
D52-D	120mm*120mm*27mm	Alloy steel(HRC58°)	0.005mm	35Nm	52*52	2.5KG

应用： 应用于CNC快速更换夹具工件等可配套虎钳系列H77,H90,H54,H120,
Apply: Applied to CNC fast replacement of fixture workpieces Matching vice series H77,H90,H54,H120,

D52圆型手动零点定位板 D52 circular manual zero positioning plate

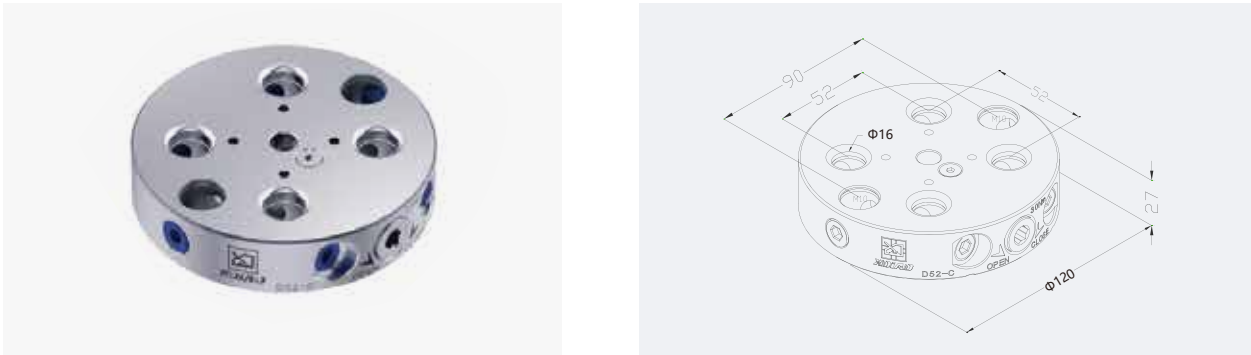


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size	材质 material	重复定位精度 Repeated positioning accuracy	螺杆最大扭矩 Maximum torque of screw	定位孔间距 Spacing of locating holes	重量 weight
D52-C	120mm*120mm*27mm	Alloy steel(HRC58°)	0.005mm	30Nm	52*52	1.9KG

应用： 应用于CNC快速更换夹具工件等,可配套虎钳系列H77,H90,H54,H120
Apply: Applied to CNC fast replacement of fixture workpieces Matching vice series H77,H90,H54,H120

D52长方手动零点定位板 D52 rectangular manual zero positioning plate

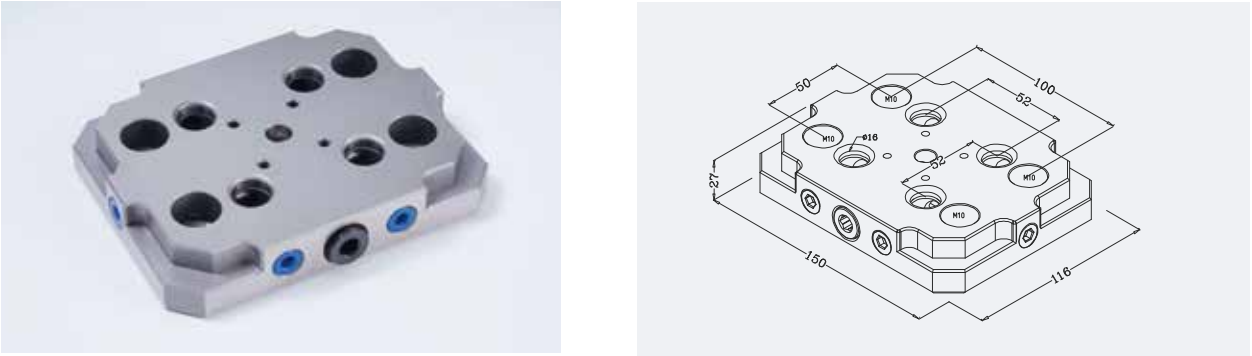


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size	材质 material	重复定位精度 Repeated positioning accuracy	螺杆最大扭矩 Maximum torque of screw	定位孔间距 Spacing of locating holes	重量 weight
D52-L	150mm*116mm*27mm	Alloy steel(HRC58°)	0.005mm	35Nm	52*52	2.9KG

应用： 应用于CNC快速更换夹具工件等可配套虎钳系列H77,H90,H54,H120,
Apply： Applied to CNC fast replacement of fixture workpieces Matching vice series H77,H90,H54,H120,

D52零点拉丁 D52 zero Latin

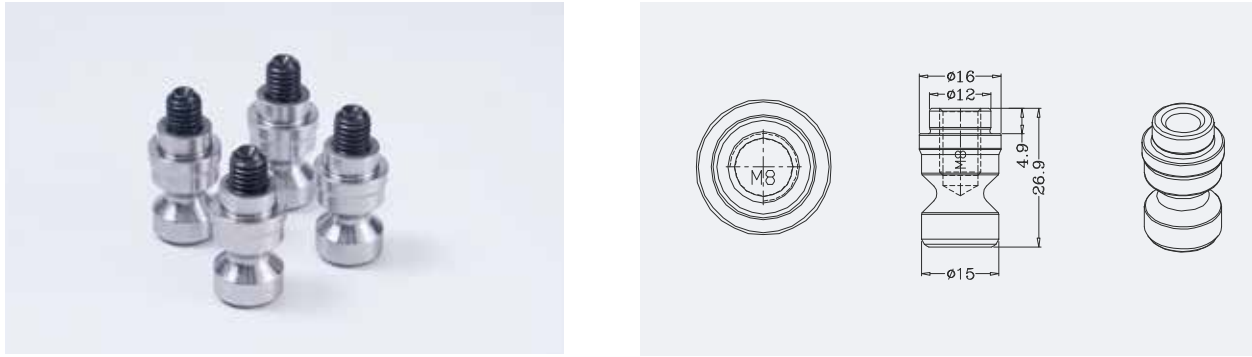

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size	材质 material
D52-LD	16mm*16mm*26.9mm	4CR13(HRC52°)

应用： 安装于夹具或者工件底部实现快换连接
Apply： Install at the bottom of the fixture or workpiece to achieve quick change connection

D96 零点拉丁 D96 zero Latin




产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size	材质 material
D96-LD	20mm*20mm*26.9mm	4CR13(HRC52°)

应用： 安装于夹具或者工件底部实现快换连接
Apply： Install at the bottom of the fixture or workpiece to achieve quick change connection

D96正方手动零点定位板 D96 square manual zero positioning plate

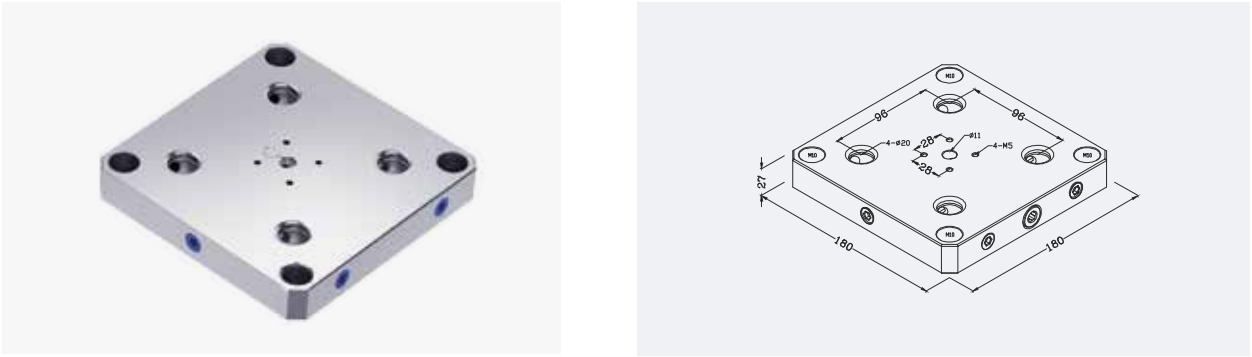

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size	材质 material	重复定位精度 Repeated positioning accuracy	螺杆最大扭矩 Maximum torque of screw	定位孔间距 Spacing of locating holes	重量 weight
D96-D	180mm*180mm*27mm	Alloy steel(HRC58°)	0.005mm	35Nm	96*96	4KG

应用： 安装于夹具或者工件底部实现快换连接
Apply： Install at the bottom of the fixture or workpiece to achieve quick change connection

D96正方手动零点定位板 D96 square manual zero positioning plate




产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size	材质 material	重复定位精度 Repeated positioning accuracy	螺杆最大扭矩 Maximum torque of screw	定位孔间距 Spacing of locating holes	重量 weight
D96-C	180mm*180mm*27mm	Alloy steel(HRC58°)	0.005mm	30Nm	96*96	2.5KG

应用： 应用于CNC快速更换夹具工件等可配套虎钳系列H125, H120, H200
Apply： Applied to CNC fast replacement of fixture workpieces Can be matched with vice series H125 H120 H200

D96双工位正方手动零点定位板 D96 double station square manual zero positioning plate

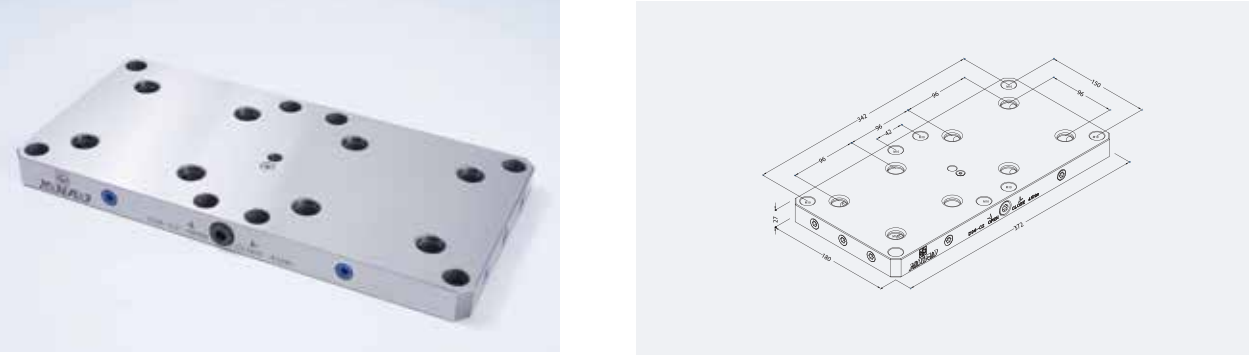


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size	材质 material	重复定位精度 Repeated positioning accuracy	螺杆最大扭矩 Maximum torque of screw	定位孔间距 Spacing of locating holes	重量 weight
D96-D	180mm*180mm*27mm	Alloy steel(HRC58°)	0.005mm	35Nm	96*96	8KG

应用： 应用于CNC快速更换夹具工件等可配套虎钳系列H125 H120 H200
Apply： Applied to CNC fast replacement of fixture workpieces Can be matched with vice series H125 H120 H200


D96双工位加高塔堆 D96 double station tower stack

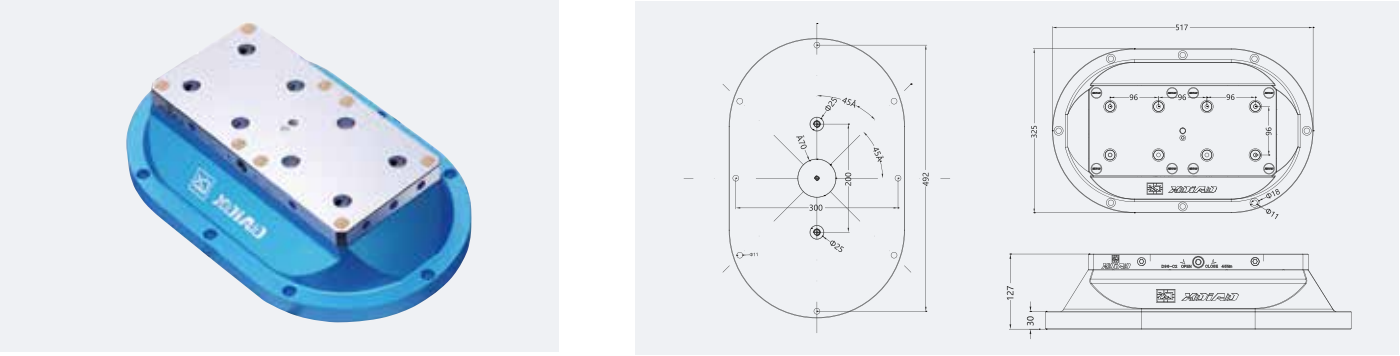

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重量 weight
D96-C2-L100	直径517mm*517mm*127mm	42KG


D325加高塔堆 D325 increased tower pile

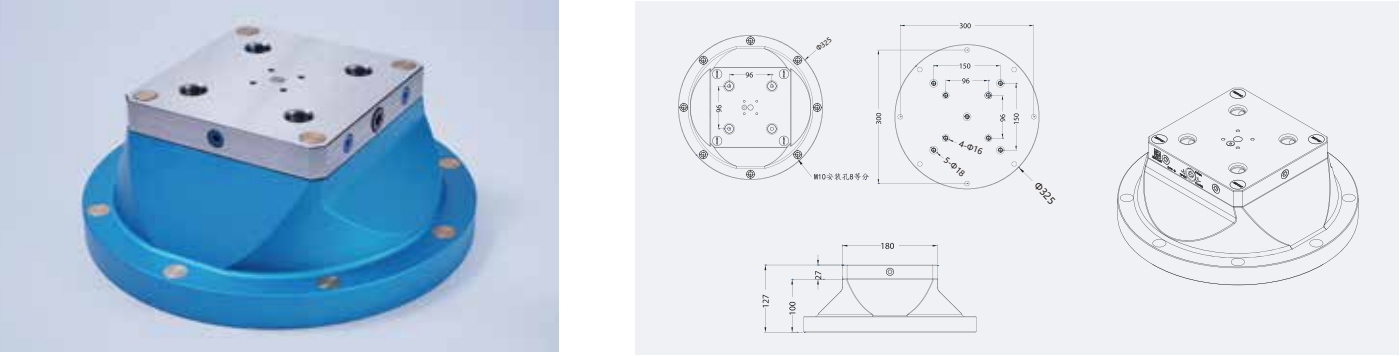

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重量 weight
D325-L100	直径325mm*127	22KG


D250矮款塔堆 D250 low tower stack

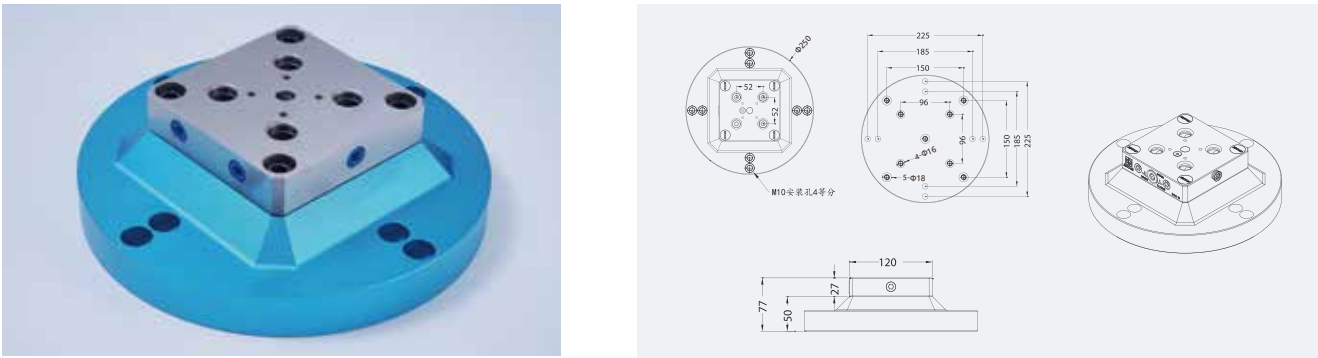

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重量 weight
D250-L50	直径250mm*77	7.5KG


D52-3D五轴塔堆 D52-3D five-axis tower pile

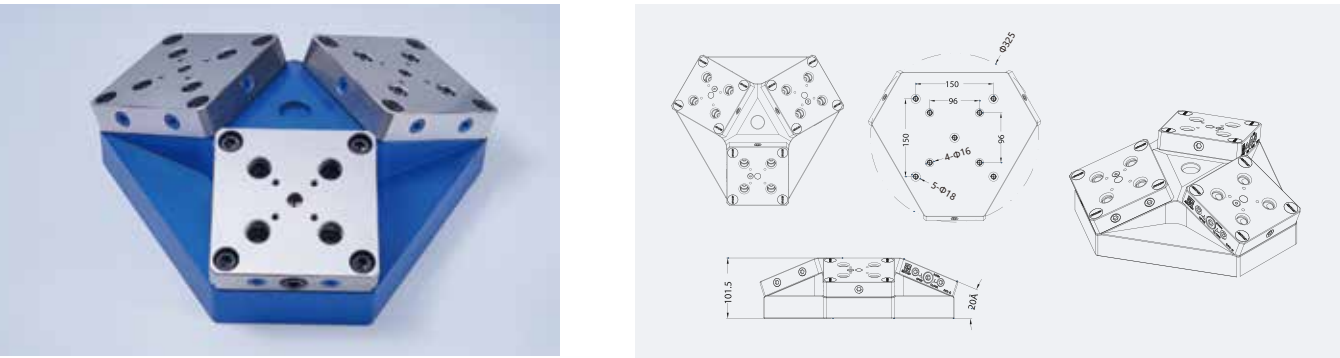

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重量 weight
D52-3D	直径325mm*105.5	18KG


D250加高塔堆 D250 increased tower pile

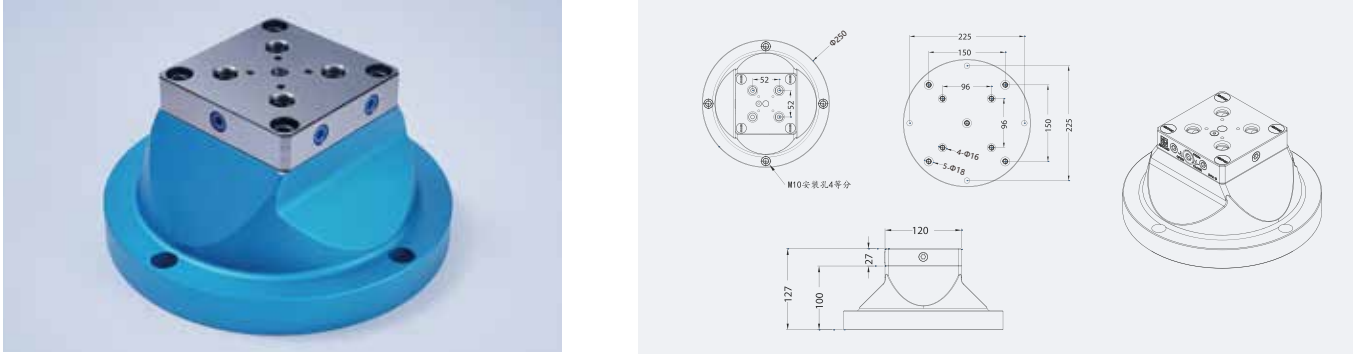

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重量 weight
D250-L100	直径250mm*127	11KG


D250-3S五轴塔堆 D250-3S five-axis tower

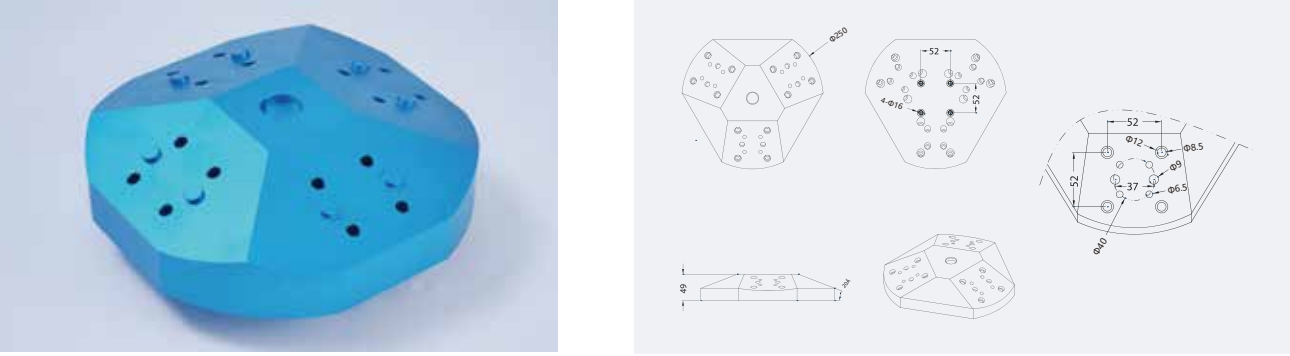

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重量 weight
D250-3S	直径250mm*49	4.3KG


D250-3S五轴塔堆 D250-3S five-axis tower

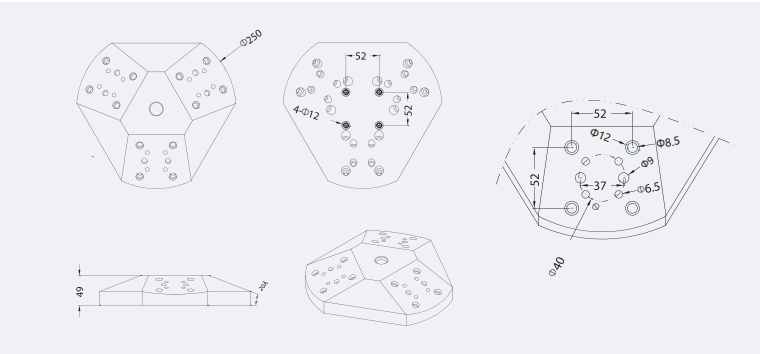

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重量 weight
D250-3S	直径250mm*49	4.3KG


H54/H54L通用连接板 H54/H54L Universal Connection Board

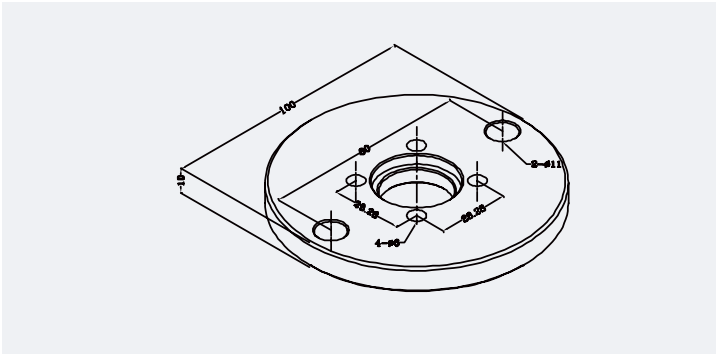

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重量 weight
ZJ-H54-H54L	直径100mm*10	1KG

96-52快换三爪卡盘 96-52 Change the three-jaw chuck

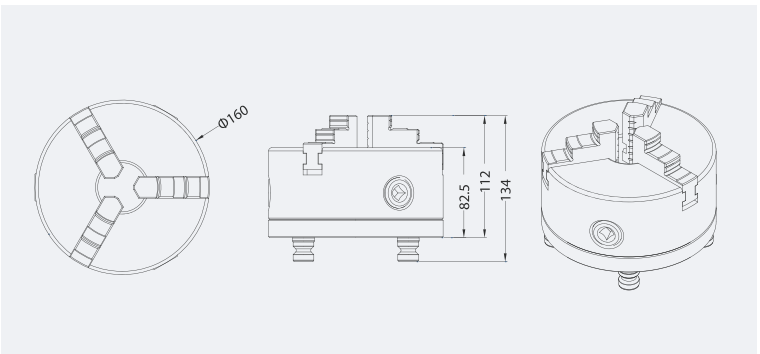


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重量 weight	产品型号:
D160-9652	160mm*160mm*131mm	9KG	

应用：底部可以装52/96两种拉钉, 搭配D52/D96快换板使用
Apply: The bottom can be installed with 52/96 two kinds of nails, with D52/D96 quick change board to use


H54/H54L通用连接板 H54/H54L Universal Connection Board

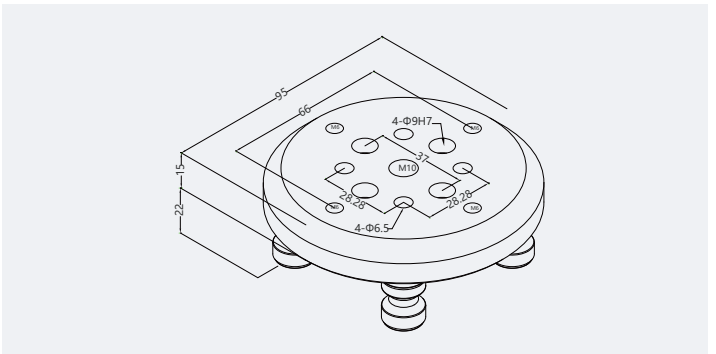

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重量 weight
ZJ-H54-D52	直径100mm*37	1KG

D125转接板 D125 adapter board

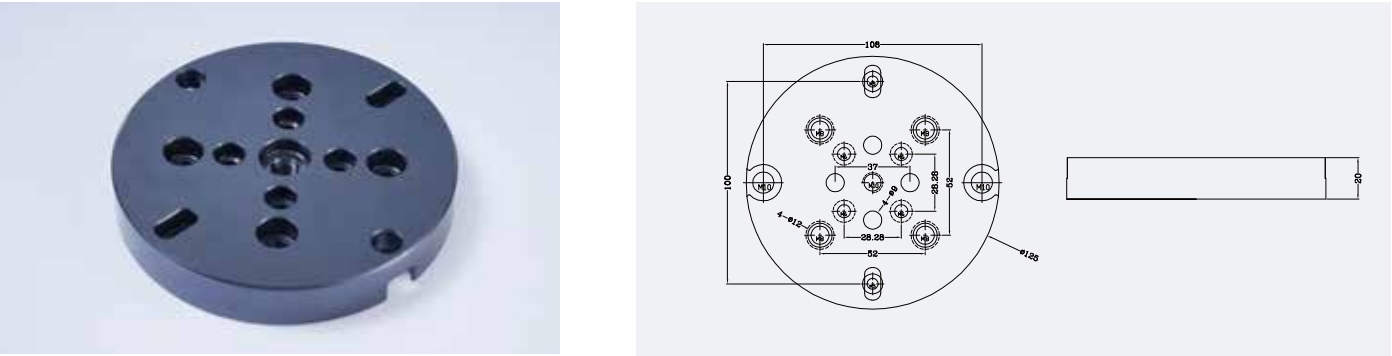


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
ZJ-125	120mm*120mm*20mm

说明1 可连接虎钳系列(H54)(H90)(H77) 说明2 可配合零点定位系列(D52)(D96)(K20.3)
Note 1 Connectable Vice Series (H54)(H90)(H77) Note 2 Compatible with zero position series (D52)(D96)(K20.3)

D170转接板 D170 adapter board

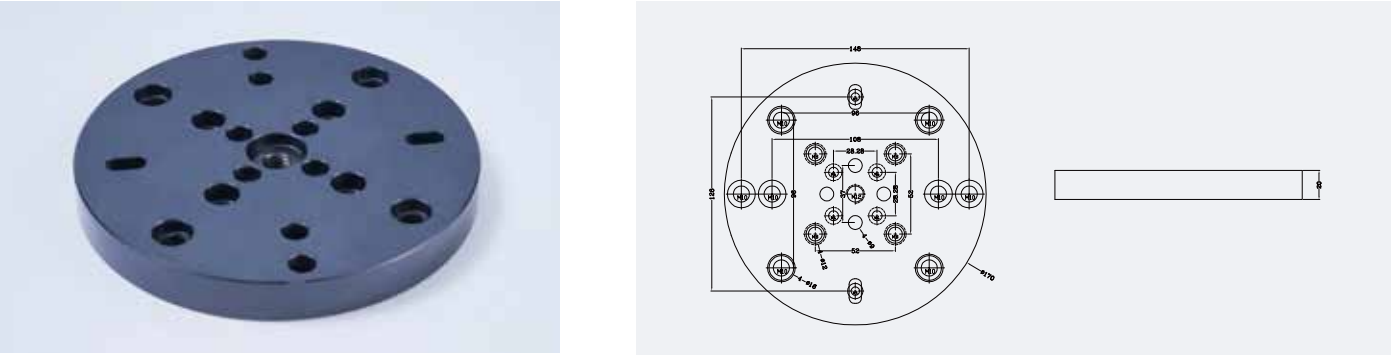


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
ZJ-170	170mm*170mm*20mm

说明1 可连接虎钳系列(H54)(H90)(H77)(H120)(H125) 说明2 可配合零点定位系列(D52)(D96)(K20.3)(K40)
Note 1 Connectable Vice Series (H54)(H90)(H77)(H120)(H125) Note 2 Compatible with zero position series (D52)(D96)(K20.3)(K40)


8工位虎钳立柱 8 Vice column

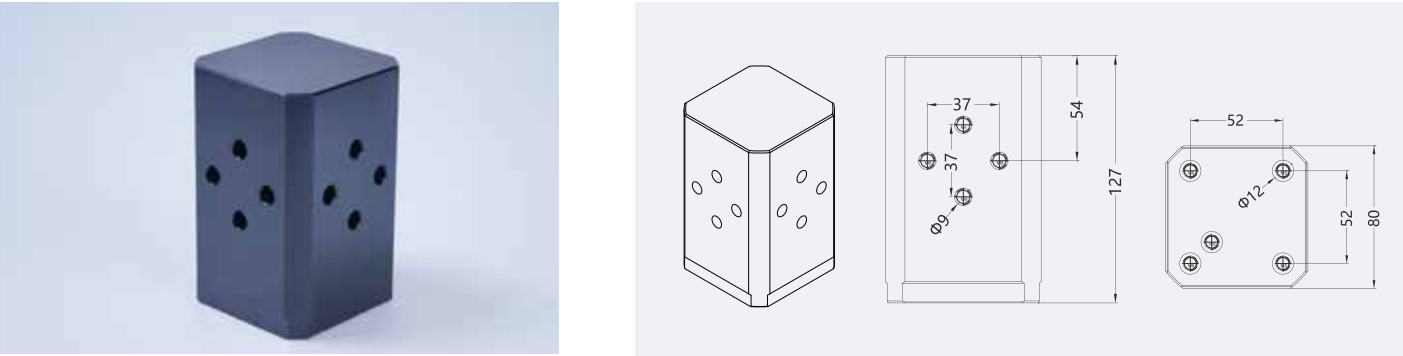

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	材质 material	重量 weight	应用场景 Suitable for turntable models
D54-H54-C8	147mm*80mm*80mm	铝7075 Aluminum 7075	2.45KG	4轴转台使用,可安装8个h54虎钳 The 4-axis turntable can be used to install 8 h54 vise


8工位虎钳立柱 8 Vice column

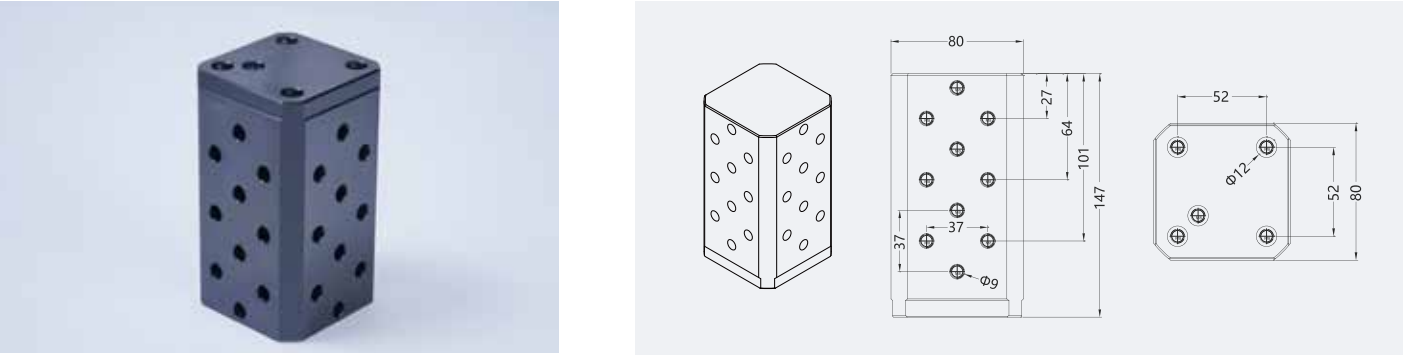

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	材质 material	重量 weight	应用场景 Suitable for turntable models
D54-H54-C8	147mm*80mm*80mm	铝7075 Aluminum 7075	2.45KG	4轴转台使用,可安装8个h54虎钳 The 4-axis turntable can be used to install 8 h54 vise


直径170单边L板窄款 Diameter 170 unilateral L plate narrow model

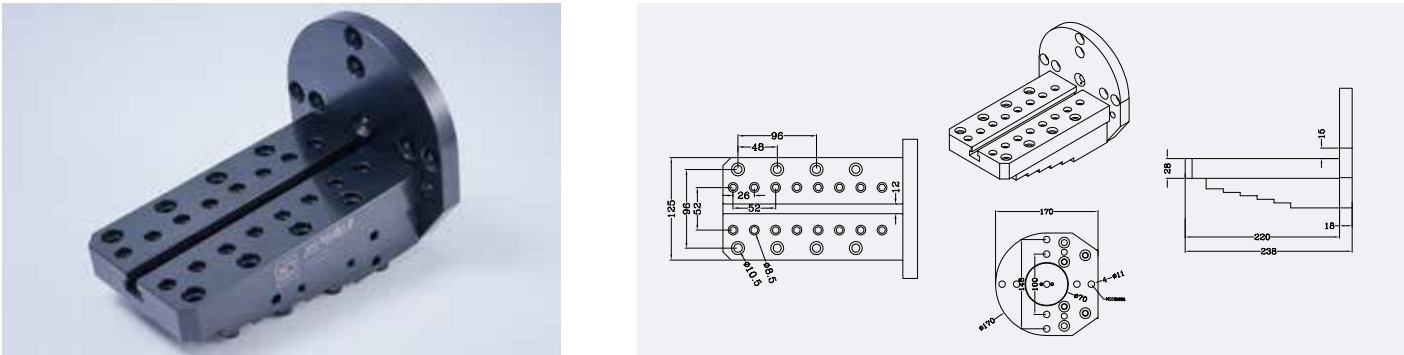

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重量 weight	适用转台型号 Suitable for turntable models
L170-125	170mm*170mm*238mm	9.5KG	125/170/210


直径170单边L板 Diameter 170 unilateral L plate

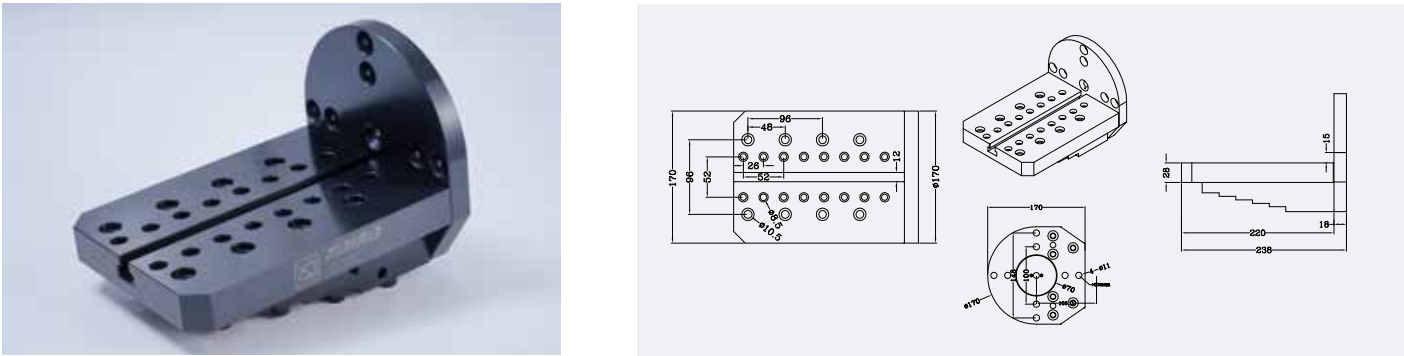

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重量 weight	适用转台型号 Suitable for turntable models
L170-170	170mm*170mm*238mm	11.8KG	125/170/210

D180L板 D180L board

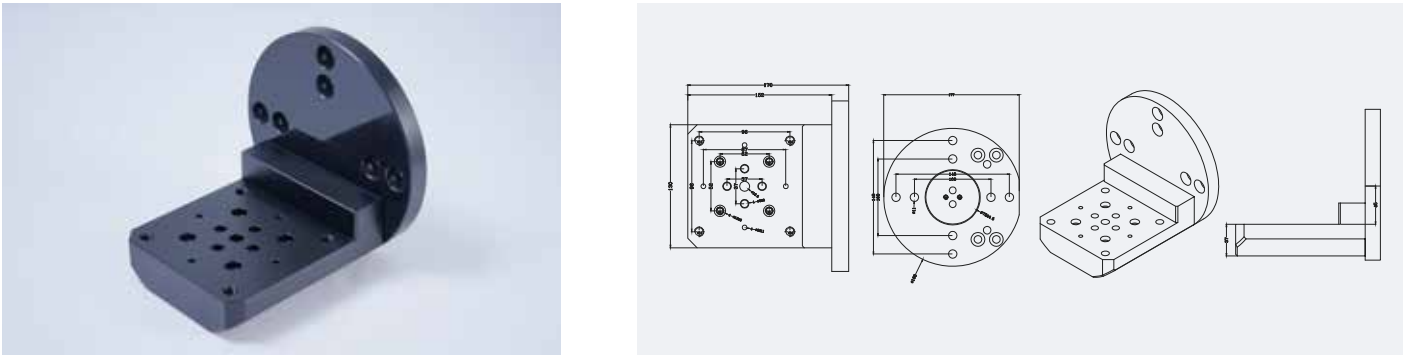


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size
L-180	180mm*177mm*170mm

说明1：可连接虎钳系列(H54)(H90)(H77)
Note 1: Connectable Vice Series (H54)(H90)(H77)

说明2：可配合零点定位系列(D52)
Note 2: Compatible with zero positioning series (D52)


直径225单边L块 Diameter 225 unilateral L block

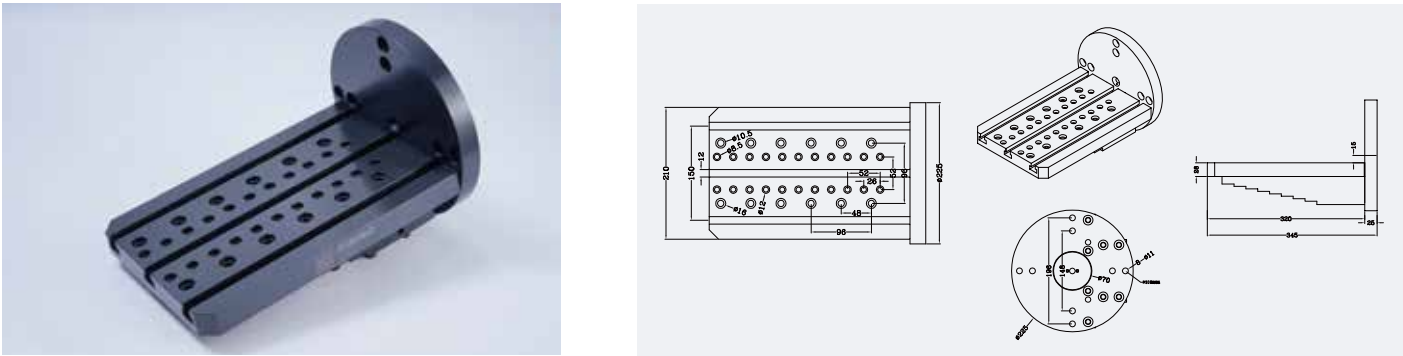

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重量 weight	适用转台型号 Suitable for turntable models
L225-210	225mm*225mm*345mm	22.5KG	210/225/250/320

D96零点专用L块 D96 zero special L block

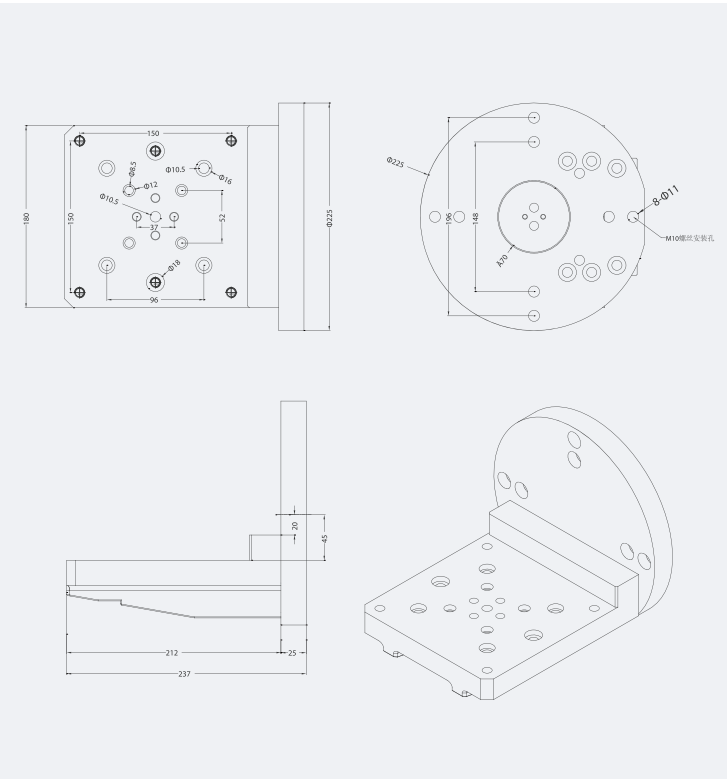


说明1： 可连接虎钳系列 (H54) (H54L)(H77)(H90)
Note 1: (H120)(H125)
Connecting Vice Clamp Series (H54) (H54L) (H77) (H90) (H120) (H125)

说明2： 可搭配零点定位系列 (D52) (D96)
Note 2: Can be paired with zero point positioning series (D52) (D96)

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
L225-D96	225mm*225mm*237mm


H67Y液压自定心虎钳 H67Y hydraulic self-centering vice

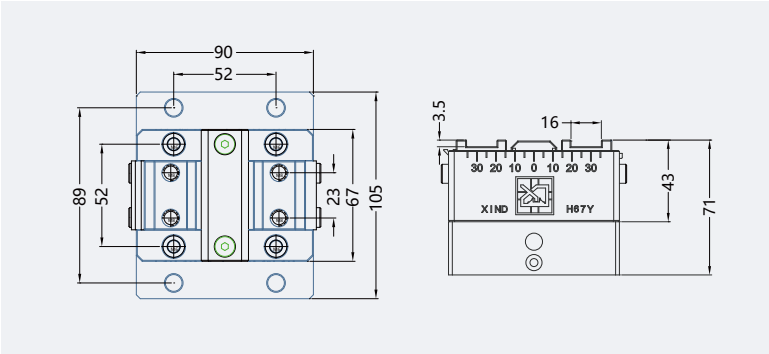

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	材质 material	重量 weight	最大压力 Maximum pressure	最大夹持力 Maximum clamping force	行程 journey
H67Y H67Y-C	105mm*90mm*71mm Customize multiple combinations	Alloy steel HRC58°	3.5KG	10MPA	19KN	4mm


H90Y液压自定心虎钳 H90Y hydraulic self-centering vice

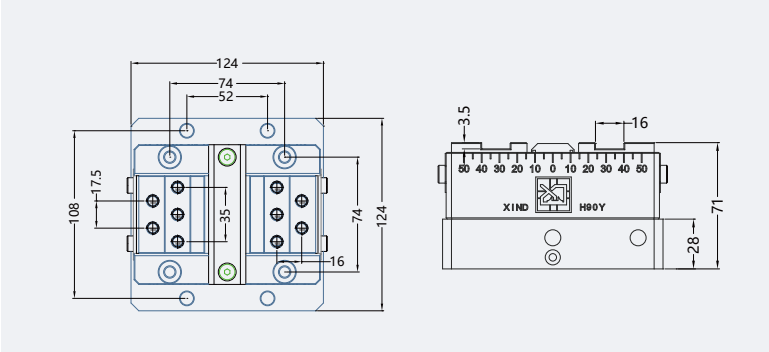

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	材质 material	重量 weight	最大压力 Maximum pressure	最大夹持力 Maximum clamping force	行程 journey
H90Y H90Y-C	124mm*24mm*71mm Customize multiple combinations	Alloy steel HRC58°	6.1KG	10MPA	25KN	4mm


W120液压自定心虎钳 W120 hydraulic self-centering vice

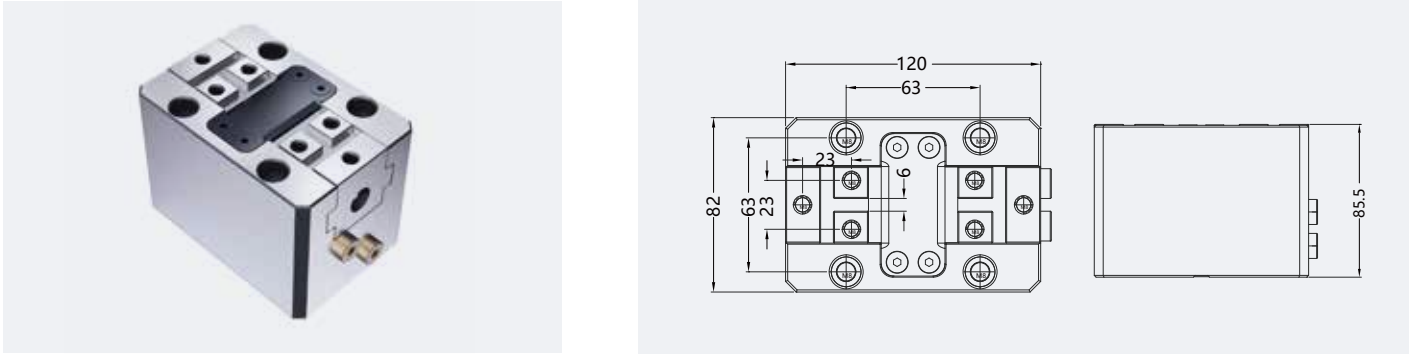

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	材质 material	重量 weight	最大压力 Maximum pressure	最大夹持力 Maximum clamping force	行程 journey
W120	120mm*82mm*85.5mm	Alloy steel	5.6KG	10MPA	20KN	10mm
W120-C	Customize multiple combinations	HRC58°				


H125液压自定心虎钳 H125 hydraulic self-centering vice

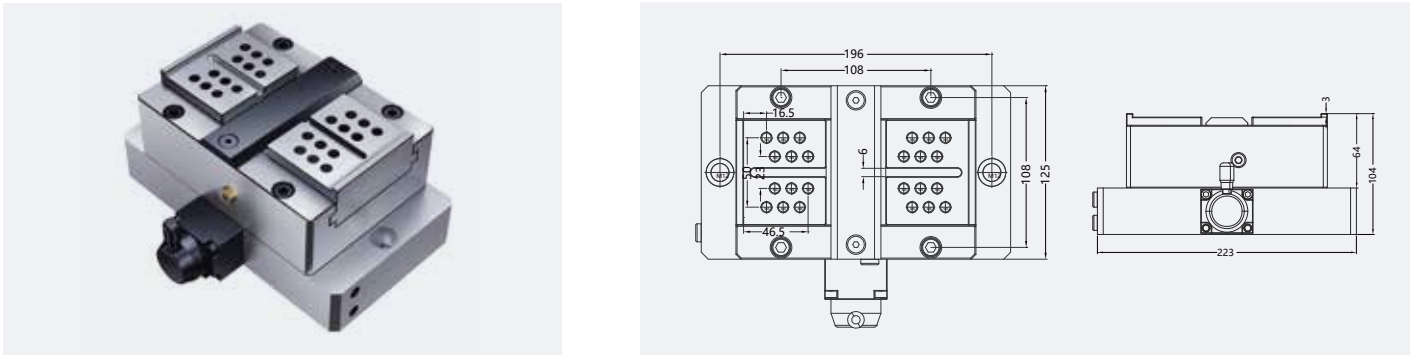

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	材质 material	重量 weight	最大压力 Maximum pressure	最大夹持力 Maximum clamping force	行程 journey
H125Y	223mm*125mm*104mm	Alloy steel	18.5KG	10MPA	40KN	4mm
H125Y-C	Customize multiple combinations	HRC58°				

9工位液压虎钳 9 station hydraulic vise

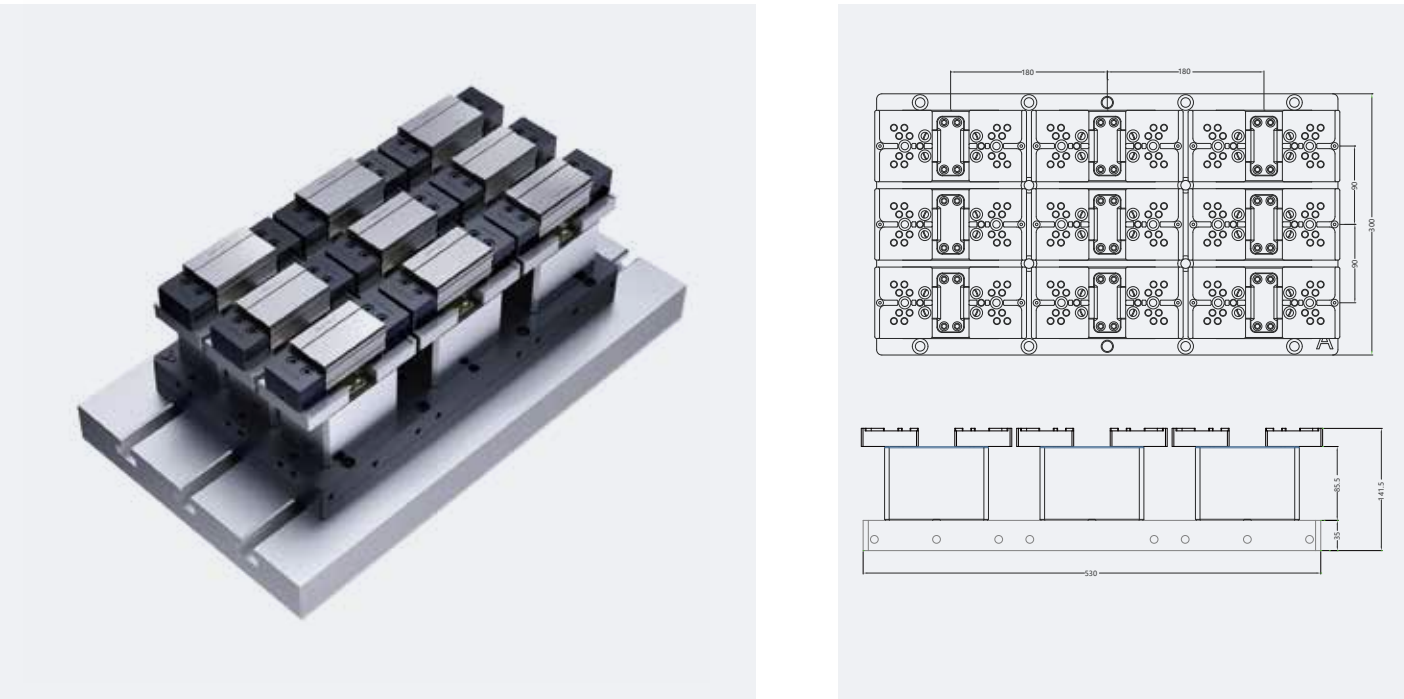

应用场景：


Application scenario:

多工位批量产品加工, 排列方式可定制
Multi-station batch product processing, arrangement can be customized

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
W120-C9	530mm*300mm*141.5mm
W120-C9-C	Customized on demand

2工位双面液压虎钳 2 stations double sided hydraulic vise

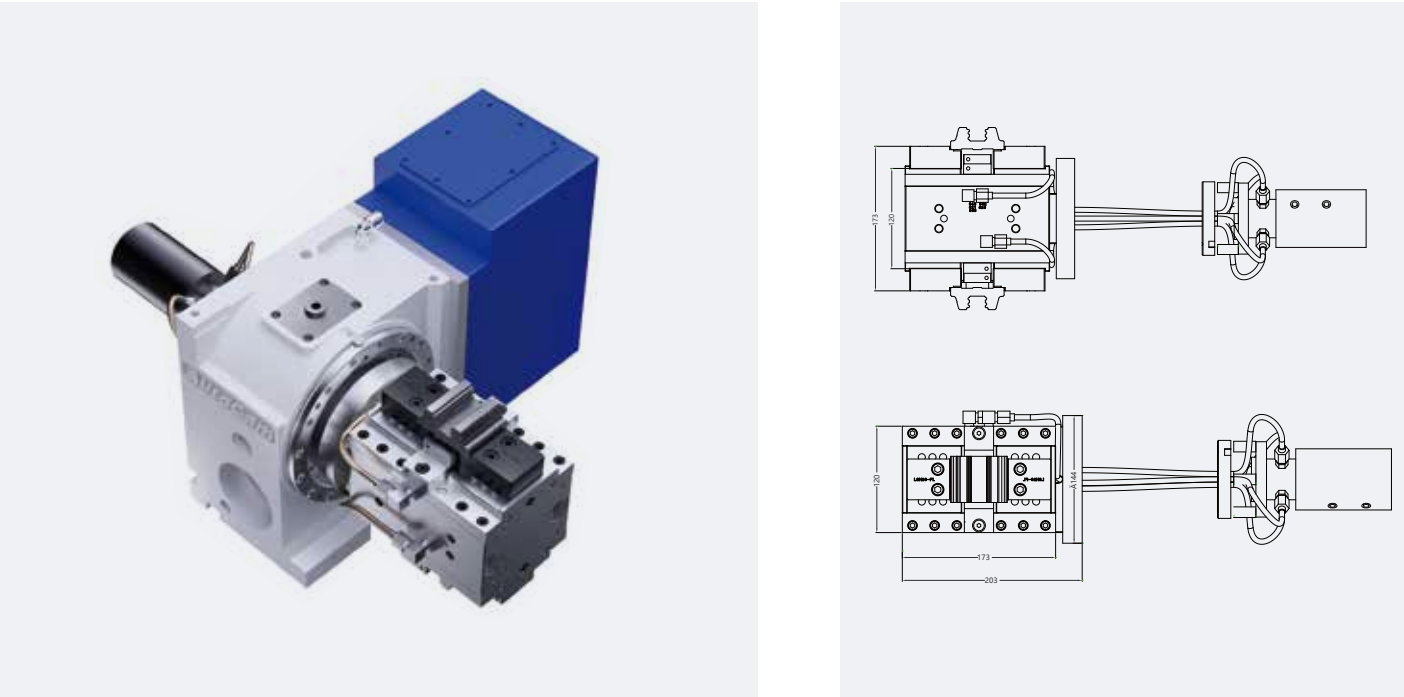


应用场景：
Application scenario:
4轴批量产品加工, 本体结构紧凑节省安装空间
4 axis batch product processing, compact body structure to save installation space

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
H120Y-C2	173mm*120mm*120mm
H120Y-C2-C	Customized on demand

6工位双面液压虎钳 6 stations double sided hydraulic vise

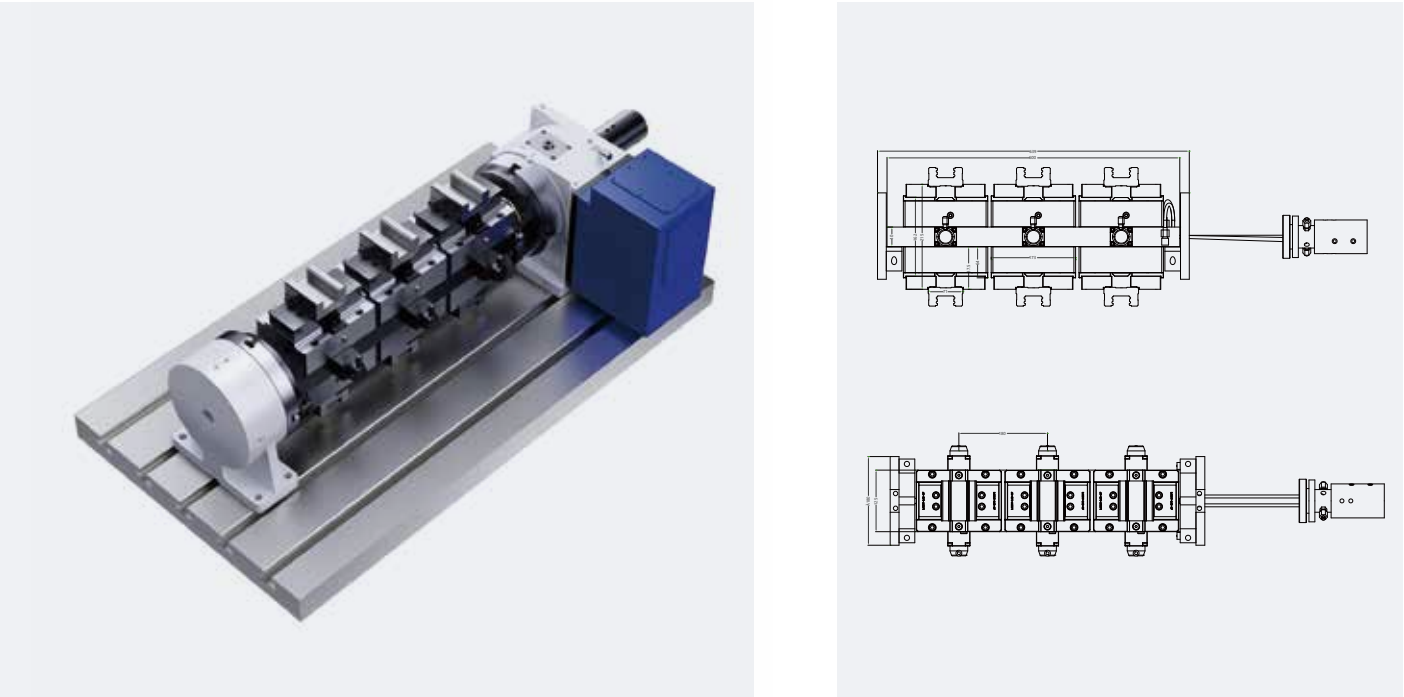

应用场景：
Application scenario:
4轴多工位批量产品加工, 排列方式可定制
4-axis multi-station batch product processing, arrangement can be customized


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size
H125Y-C6	600mm*165mm*125mm
H125Y-C6-C	Customized on demand

PRODUCT DISPLAY | K20.3 Zero point positioning
产品展示 | K20.3零点定位



K20.3零点主体 K20.3 zero point body

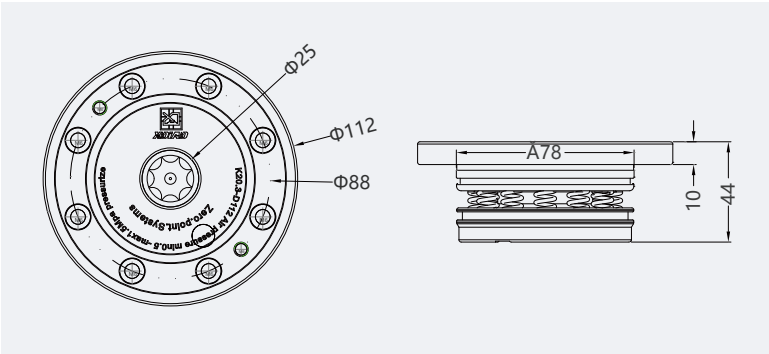


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	材质 material	重量 weight	最大气压 Maximum atmosphere	最大夹持力 Maximum clamping force	顶升行程 Lifting stroke
K20.3	112mm*112mm*44mm	合金钢 HRC58° Alloy steel HRC58°	1.4KG	1.2MPA	17KN	2mm

应用场景： 需2个以上上组合使用, 任意排列形式
Application scenario: Need more than 2 combinations, arbitrary arrangement form

K20.3零点主体带定向 K20.3 zero body with orientation

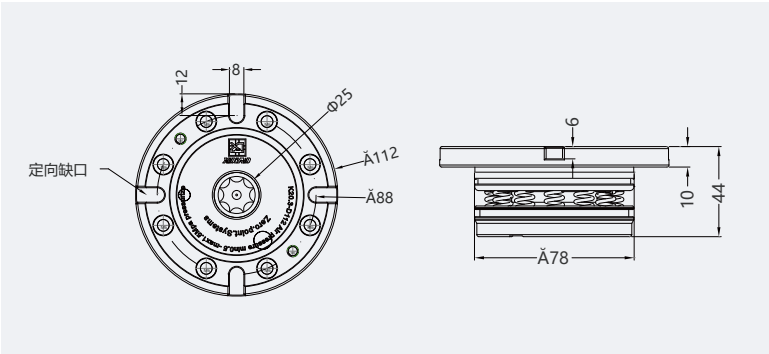


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	材质 material	重量 weight	最大气压 Maximum atmosphere	最大夹持力 Maximum clamping force	顶升行程 Lifting stroke
K20.3-1	112mm*112mm*44mm	合金钢 HRC58° Alloy steel HRC58°	1.4KG	1.2MPA	17KN	2mm

应用场景： 带定向缺口配合定位键块可以单个使用
Application scenario: Directional notches with positioning blocks can be used individually

K20.3零点自动化主体 K20.3 Zero point automation body

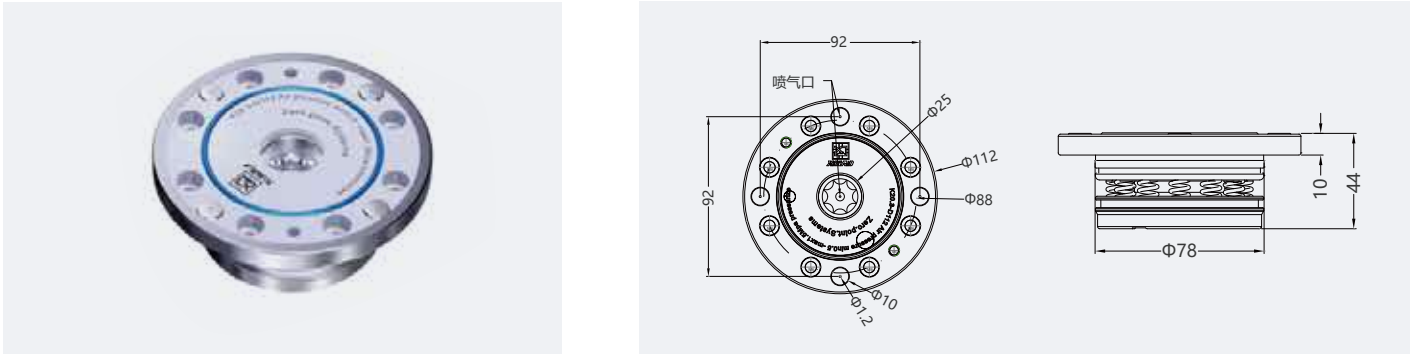


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	材质 material	重量 weight	最大气压 Maximum atmosphere	最大夹持力 Maximum clamping force	顶升行程 Lifting stroke
K20.3-2	112mm*112mm*44mm	合金钢 HRC58° Alloy steel HRC58°	1.4KG	1.2MPa	17KN	2mm

应用场景： 自动化使用，中心表面带喷气，可以接气密检测
Application scenario: Automatic use, the center surface with air, can be connected to the airtight detection

单点零点定位 Single point zero positioning

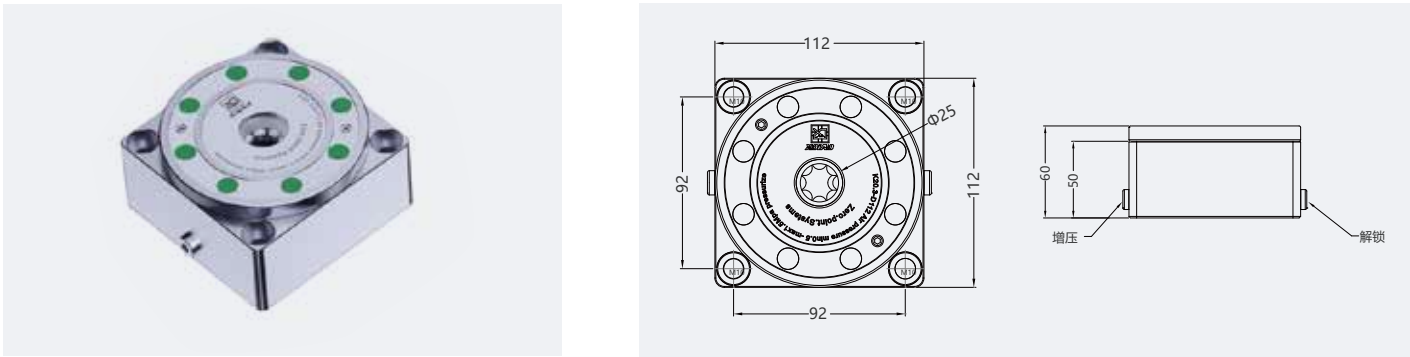


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	基础板材质 Substrate quality	重量 weight
K20.3-C1 K20.3-C1-1 K20.3-C1-2	112mm*112mm*50mm main body is installed with 4 positioning notches Automated use, center surface with air jet	S136H	4.3KG

应用场景： 3轴单个使用或多个组合，可底部进气
Application scenario: 3 shafts for single use or multiple combinations, can be bottom air intake

2基准零点定位 2 Base zero positioning

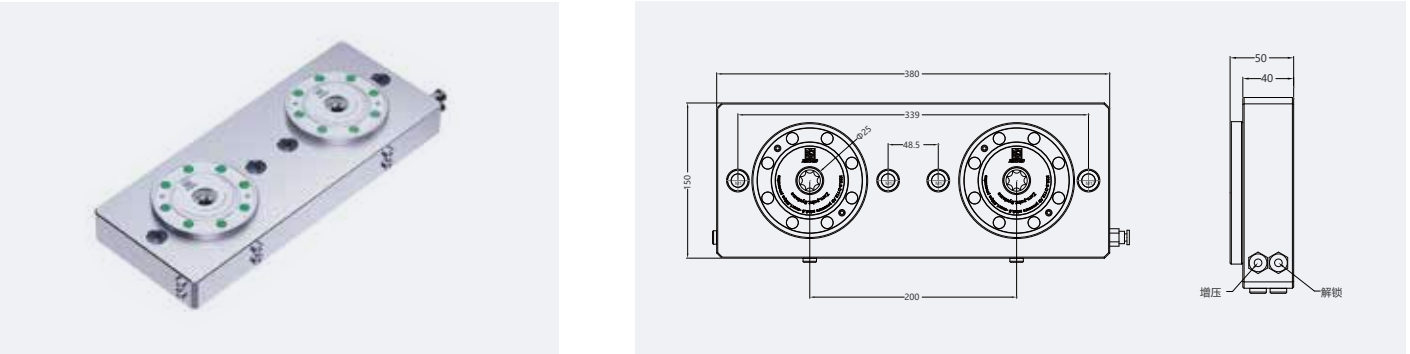


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	基础板材质 Substrate quality	重量 weight
K20.3-C2 K20.3-C2-1 K20.3-C2-2	380mm*150mm*50mm main body is installed with 4 positioning notches Automated use, center surface with air jet	S136H	16.5KG

应用场景： 3轴加工中心使用，可定制
Application scenario: 3 axis machining center, can be customized

4基准零点定位 4 Base zero positioning

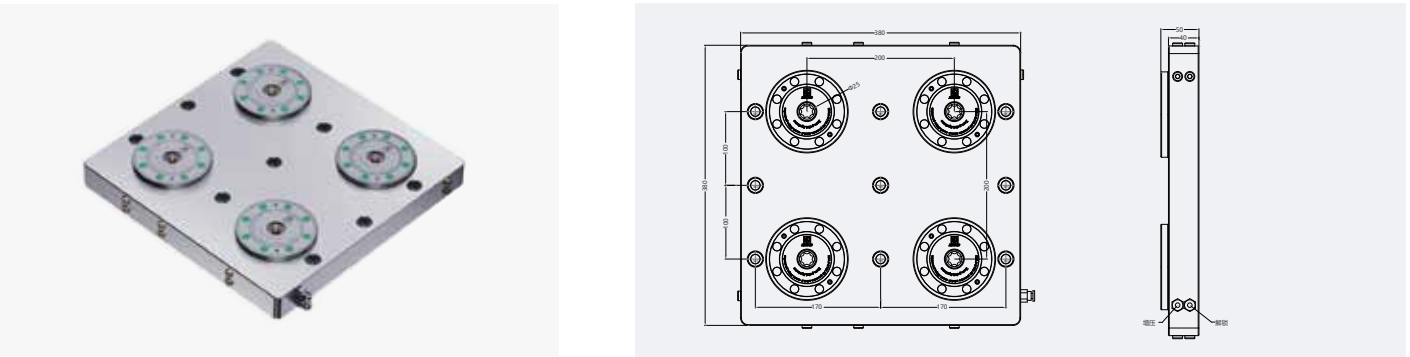


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	基础板材质 Substrate quality	重量 weight
K20.3-C4 K20.3-C4-1 K20.3-C4-2 K20.3-C4-C	380mm*380mm*50mm main body is installed with 4 positioning notches Automated use, center surface with air jet Customized on demand	S136H	42KG

应用场景： 3轴加工中心使用，可定制
Application scenario: 3 axis machining center, can be customized

90度2基准零点定位 90 degrees 2 reference zero positioning


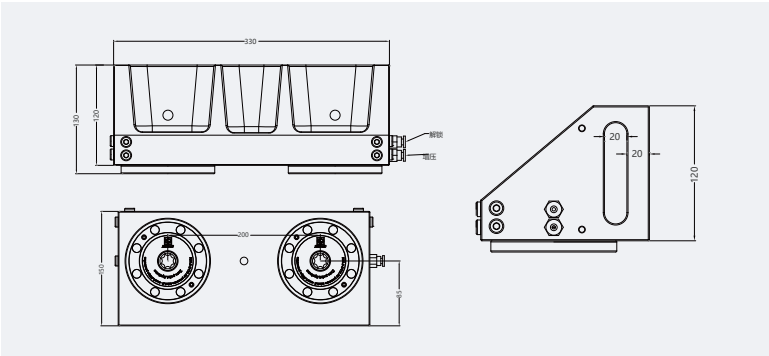


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	基础板材质 Substrate quality	重量 weight
K20.3-L2 K20.3-L2-1 K20.3-L2-2 k20.3-L2-C	330mm*150mm*120mm Main body is installed with 4 positioning notches Automated use, center surface with air jet Customized on demand	S136H	22.5KG

应用场景： 3轴加工中心使用, 可定制
Application scenario: 3 axis machining center, can be customized

侧立两用4基准零点定位 Side-standing dual purpose 4 reference zero positioning

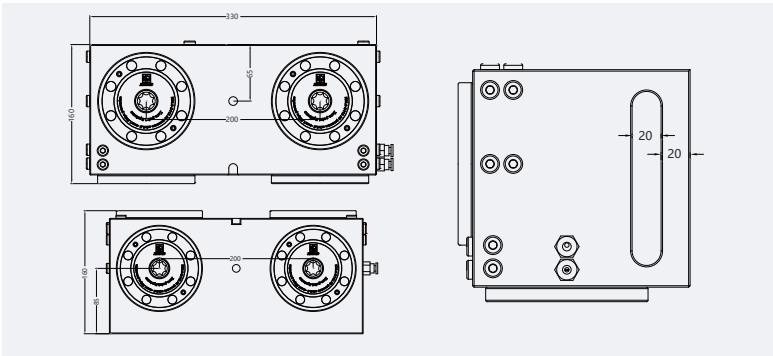
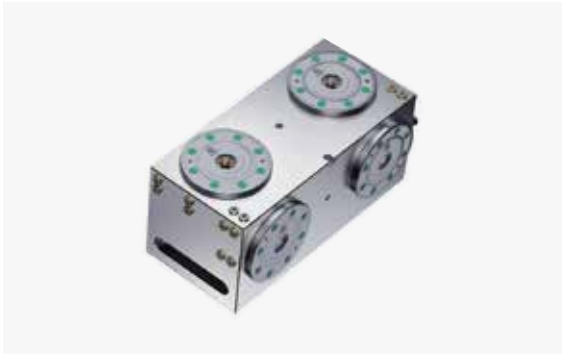


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	基础板材质 Substrate quality	重量 weight
K20.3-L2 K20.3-L4-1 K20.3-L4-2 k20.3-L4-C	330mm*160mm*160mm Main body is installed with 4 positioning notches Automated use, center surface with air jet Customized on demand	S136H	55.5KG

应用场景： 3轴加工中心0度90度使用, 可定制
Application scenario: 3-axis machining center 0 degrees 90 degrees use, can be customized

6基准零点定位 6 Base zero positioning

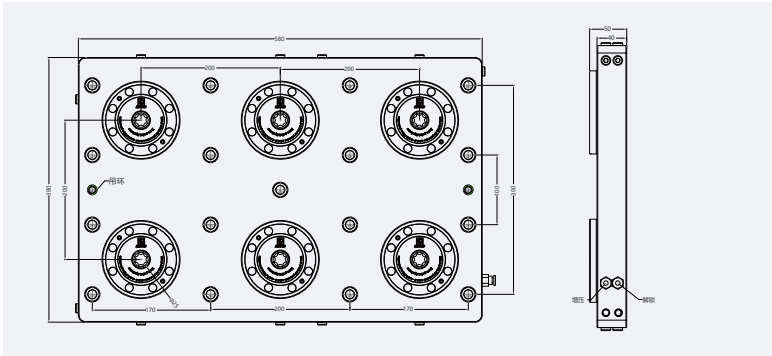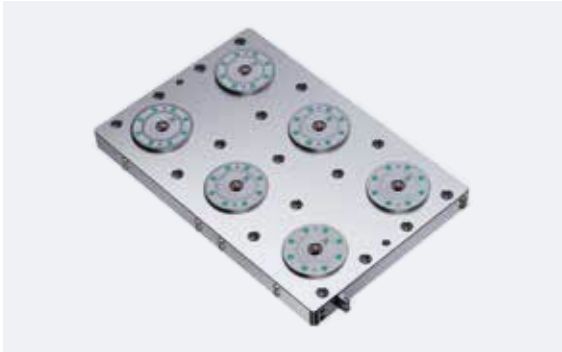


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	基础板材质 Substrate quality	重量 weight
K20.3-C6 K20.3-C6-1 K20.3-C6-2 k20.3-C6-C	580mm*380mm*50mm Main body is installed with 4 positioning notches Automated use, center surface with air jet Customized on demand	S136H	64.5KG

应用场景： 3轴加工中心使用, 可定制
Application scenario: 3 axis machining center, can be customized

圆形2基准零点定位 Circular 2 reference zero positioning

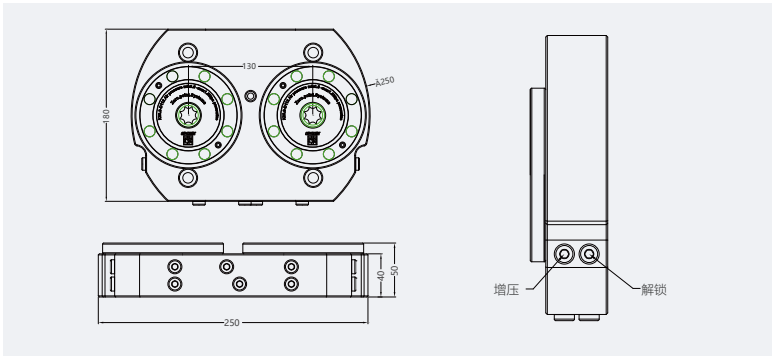


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	基础板材质 Substrate quality	重量 weight
K20.3-C2-D250 K20.3-C2-D250-1 K20.3-C2-D250-2 K20.3-C2-D250-C	250mm*180mm*50mm Main body is installed with 4 positioning notches Automated use, center surface with air jet Customized on demand	S136H	11.5KG

应用场景： 4轴5轴用可底部中心接气, 可定制
Application scenario: 4 axis 5 axis with the bottom center air, can be customized

A型定位拉钉 A-type positioning puller

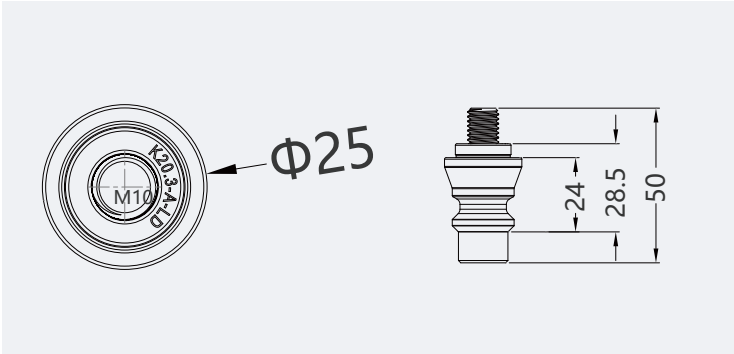


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	基础板材质 Substrate quality	重量 weight
K20.3-A-LD	25mm*25mm*50mm	440C	0.09KG

应用场景：直径25整圆接触实现定位拉紧
Application scenario: Diameter 25 full circle contact for positioning and tensoning

B型单向定位拉钉 B type unidirectional positioning nail

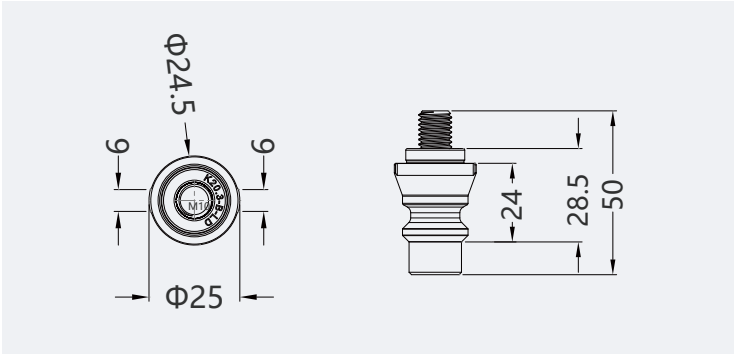


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	基础板材质 Substrate quality	重量 weight
K20.3-B-LD	25mm*24.5mm*50mm	440C	0.09KG

应用场景：外圆对称逼空两点接触只能单向定位拉紧
Application scenario: Cylindrical symmetric hollow two point contact can only be unidirectional positioning tension

C型拉钉 C-shaped nail

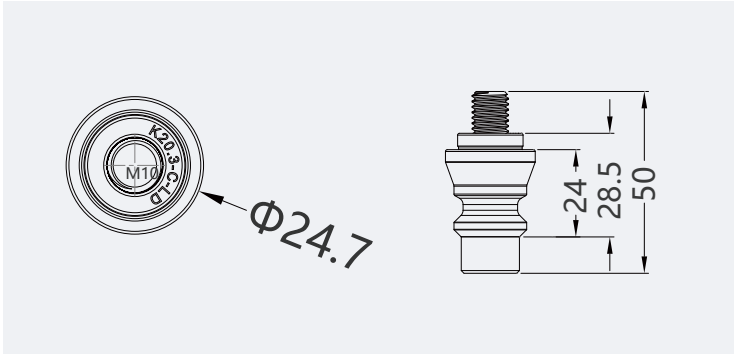


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	基础板材质 Substrate quality	重量 weight
K20.3-C-LD	25mm*24.7mm*50mm	440C	0.09KG

应用场景：外圆直径小于定位孔只拉紧
Application scenario: The diameter of the outer circle is smaller than that of the positioning hole

8X8定位键 8X8 positioning key

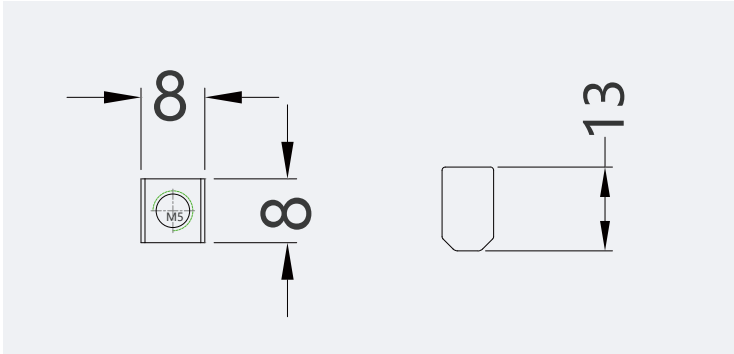


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	基础板材质 Substrate quality	重量 weight
8-8-13	8mm*8mm*13mm	440C	0.01KG

应用场景：用于定向, 通常配合拉钉一起使用
Application scenario: It is used for orientation and is usually used with a pull nail

单面零点定位桥板 One side zero positioning deck

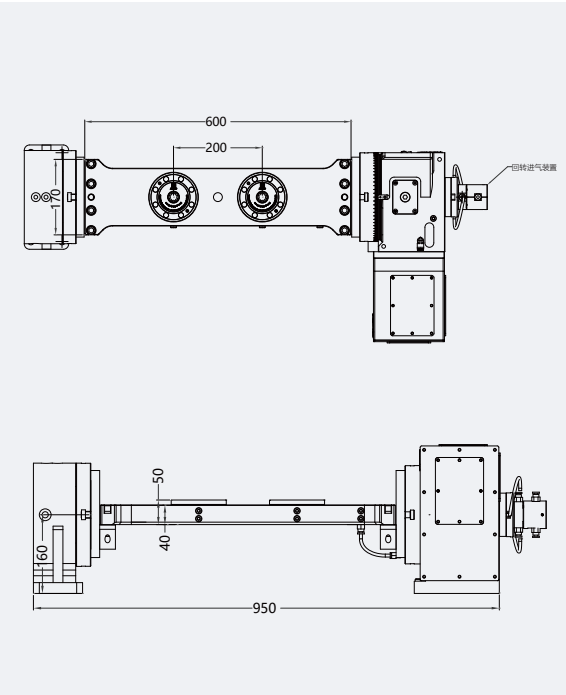


应用场景：
Application scenario:
4轴CNC机床使用, 中心进气可以任意旋转
4 axis CNC machine, the center intake can be rotated arbitrarily

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size	基础板材质 Substrate quality	重量 weight
K20.3-C2-4A K20.3-C2-4A-1 K20.3-C2-4A-2 K20.3-C2-4A-C	600mm*170mm*50mm Main body is installed with 4 positioning notches Automated use, center surface with air jet Customized on demand	S136H	23.5KG

双面零点定位桥板 Double-sided zero positioning deck


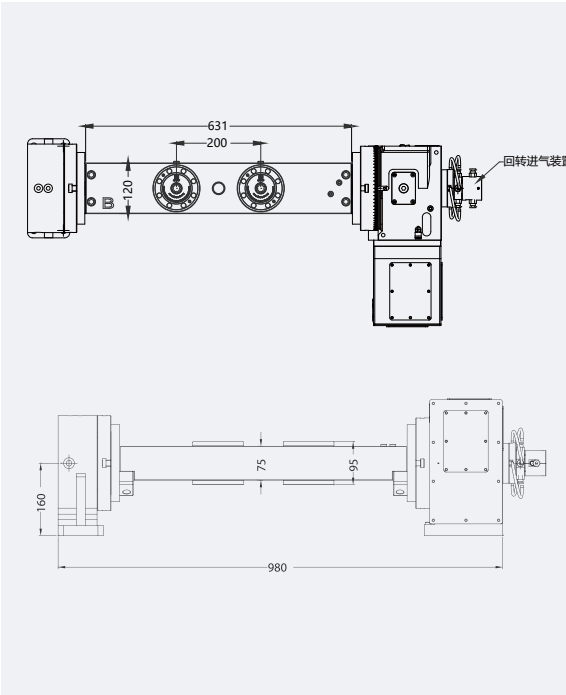


应用场景：
Application scenario:
4轴CNC机床使用, 中心进气可以任意旋转
4 axis CNC machine, the center intake can be rotated arbitrarily

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size	基础板材质 Substrate quality	重量 weight
K20.3-L4-4A K20.3-L4-4A-1 K20.3-L4-4A-2 K20.3-L4-4A-C	631mm*120mm*95mm Main body is installed with 4 positioning notches Automated use, center surface with air jet Customized on demand	S136H	40KG

单一4轴零点定位 One side zero positioning deck

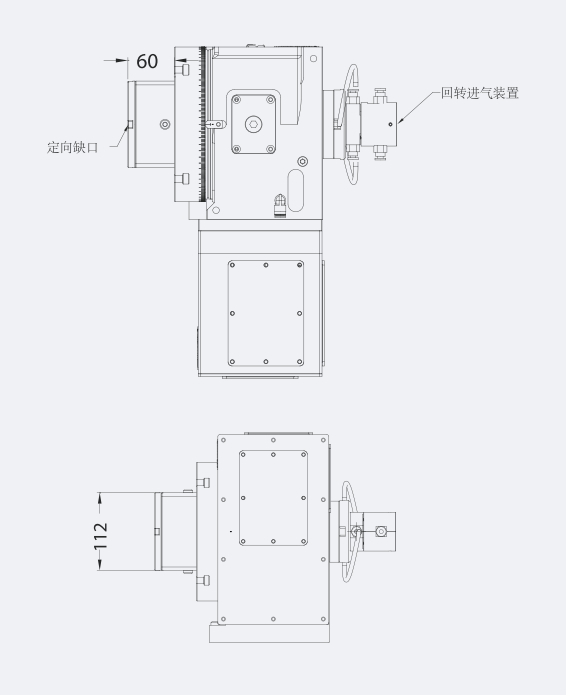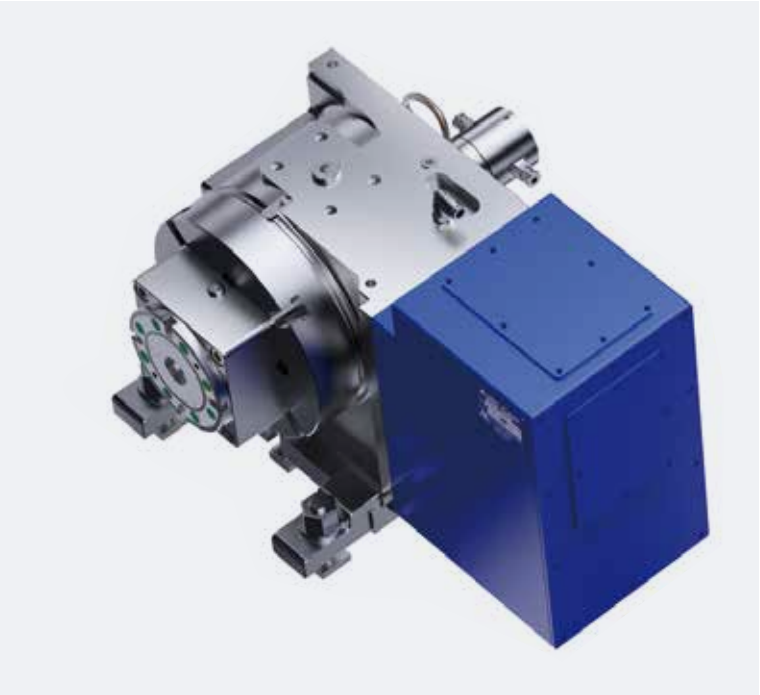

应用场景：
Application scenario:
4轴CNC机床使用, 中心进气可以任意旋转
4 axis CNC machine, the center intake can be rotated arbitrarily


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Specification and size	基础板材质 Substrate quality	重量 weight
K20.3-C1-4A	112mm*112mm*60mm	S136H	5KG

PRODUCT DISPLAY | K40 zero positioning
产品展示 | K40零点定位



K40零点主体 K40 zero point body


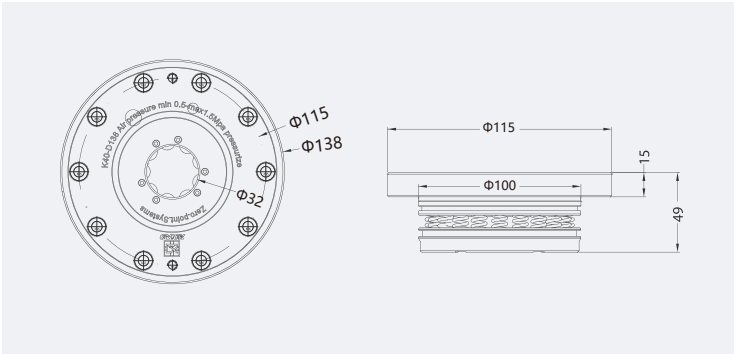


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	材质 material	重量 weight	最大气压 Maximum atmosphere	最大夹持力 Maximum clamping force	顶升行程 Lifting stroke
K40	112mm*112mm*44mm	不锈钢 HRC58° Stainless steel HRC58°	2.8KG	1.2MPa	25KN	2.5mm

应用场景： 需2个以上组合使用，任意排列形式
Application scenario: Need more than 2 combination use, arbitrary arrangement form

单点零点定位 Single point zero positioning

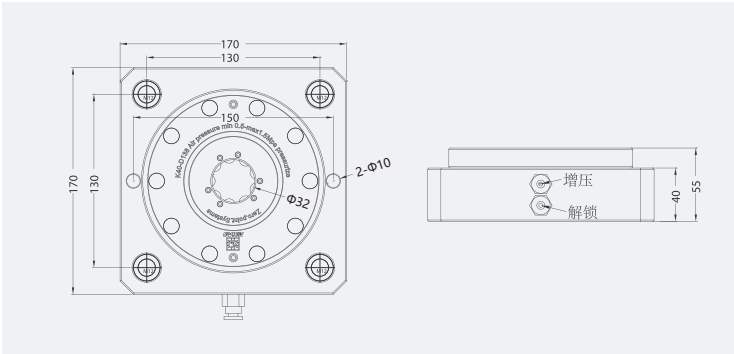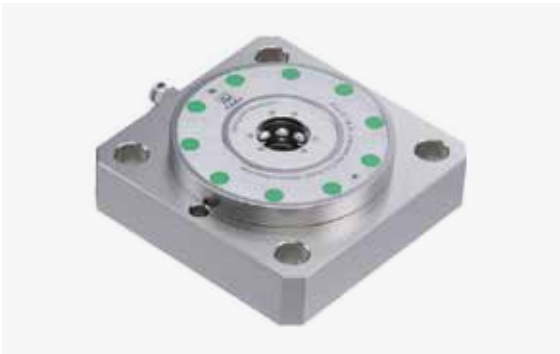


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	基础板材质 Substrate quality	重量 weight
K40-C1 K40-C1-1 K40-C1-2	170mm*170mm*55mm main body is installed with 4 positioning notches Automated use, center surface with air jet	S136H	9.5KG

应用场景： 需2个以上组合使用，任意排列形式
Application scenario: Need more than 2 combination use, arbitrary arrangement form

2基准零点定位 2 Base zero positioning

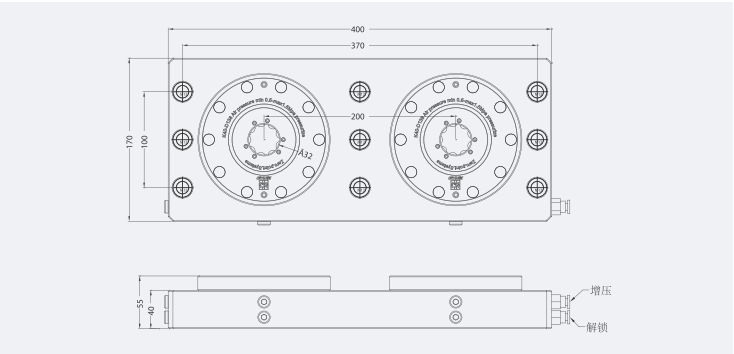


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	基础板材质 Substrate quality	重量 weight
K40-C2 K40-C2-1 K40-C2-2	400mm*170mm*55mm main body is installed with 4 positioning notches Automated use, center surface with air jet	S136H	40KG

应用场景： 3轴加工中心使用，可定制
Application scenario: 3 axis machining center, can be customized

A型定位拉钉 A-type positioning puller

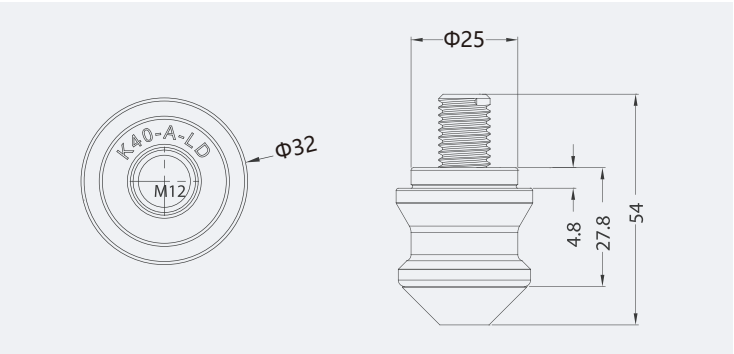

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	基础板材质 Substrate quality	重量 weight
K40-A-LD	32mm*32mm*54mm	440C	0.09KG

应用场景： 直径25整圆接触实现定位拉紧
Application scenario: Diameter 25 full circle contact for positioning and tensioning

B型单向定位拉钉 B type unidirectional positioning nail



产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	基础板材质 Substrate quality	重量 weight
K40-B-LD	32mm*21.5mm*54mm	440C	0.09KG

应用场景： 外圆对称逼空两点接触只能单向定位拉紧
Application scenario: Cylindrical symmetric hollow two point contact can only be unidirectional positioning tension

C型拉钉 C-shaped nail




产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	基础板材质 Substrate quality	重量 weight
K40-C-LD	24.7mm*24.7mm*54mm	440C	0.09KG

应用场景： 外圆直径小于定位孔只拉紧
Application scenario: The diameter of the outer circle is smaller than that of the positioning hole

2点托盘 2-point tray

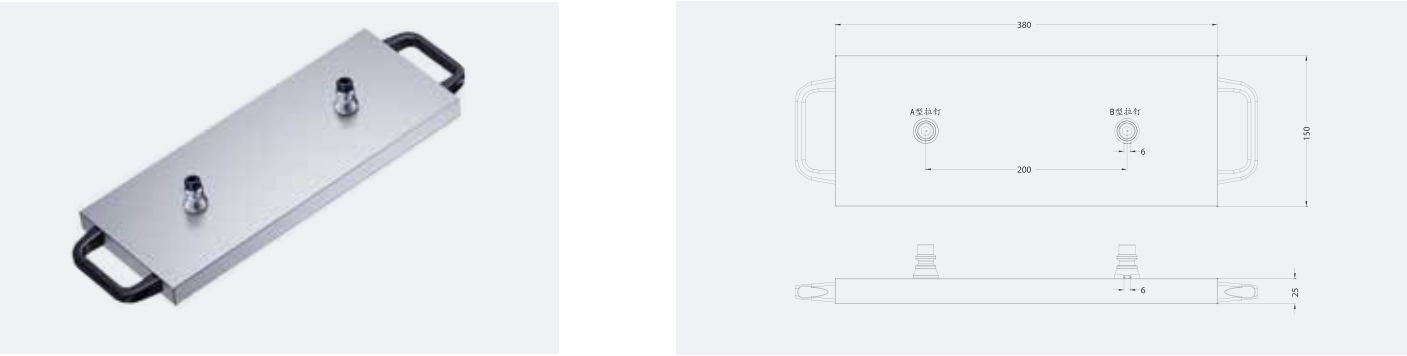

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	基础板材质 Substrate quality	重量 weight
TP-2 TP-2-1	380mm*150mm*25mm Customized on demand	S136H	11KG

应用场景： 光板装好A.B拉钉,可定制
Application scenario: Light plate installed A.B nail, can be customized

4点托盘 4 point tray




产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	基础板材质 Substrate quality	重量 weight
TP-4 TP-4-C	350mm*350mm*25mm Customized on demand	S136H	24KG

应用场景： 光板装好4个B拉钉,可定制
Application scenario: The light plate is equipped with 4 B nails, which can be customized

6点托盘 6 point tray

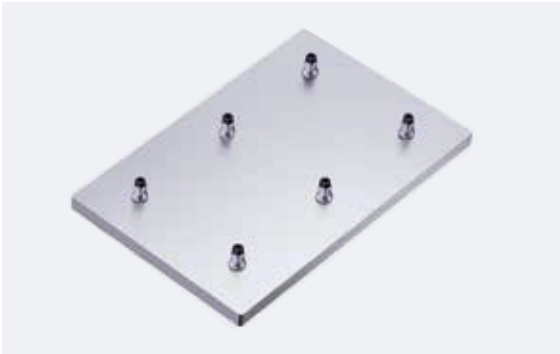


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	基础板材质 Substrate quality	重量 weight	产品型号 Product model
TP-6 TP-6-C	550mm*350mm*25mm Customized on demand	S136H	24KG	

应用场景：光板装好4个B拉钉2个C拉钉, 可定制
Application scenario: The light plate is equipped with 4 B nails and 2 C nails, which can be customized

多工位虎钳托盘 Multi-station vise tray

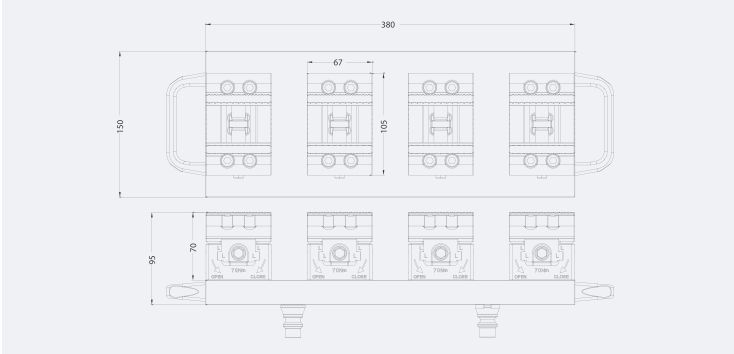


产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重量 weight
TP-52-C4	380mm*150mm*95mm	20KG

应用场景：安装4个虎钳底部孔位52*52, 可定制
Application scenario: Install four vise bottom holes 52*52, customizable

单工位大虎钳托盘 Simplex vise tray

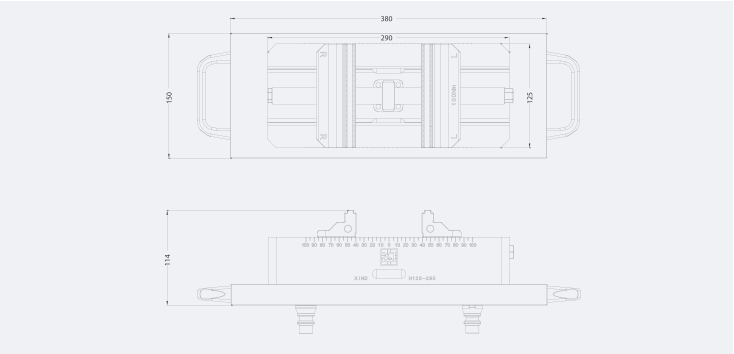

产品参数 Optical Parameters

产品型号 Product model	规格尺寸 Size and size	重量 weight
TP-96-C1	380mm*150mm*114mm	24KG

应用场景：安装1个虎钳底部孔位96*96, 可定制
Application scenario: Install one vise bottom hole 96*96, customizable